



PRODUCT REFERENCE GUIDE



www.cast-lighting.com

SOLID SAND-CAST BRONZE...BUILT TO LAST FOREVER

CLASSIC SERIES.....1

Directional Lights 1

Down Lights 1

Path/Area Lights.....2-3

Capstone/Wall Lights.....3

Deck Lights4

Well Lights4

Wall Wash4

CRAFTSMAN SERIES5

Path, Spot, Deck, Ground.....5

SPECIFICATIONS.....6-7

ACCESSORIES.....8-9

LAMPS.....10-12

TRANSFORMERS&NO-OX® WIRE.....13



EXPANDING YOUR LIGHTING SOLUTIONS

DURABLE BRASS LANDSCAPE LIGHTING



Bluetooth Color Control.....14

Directional Lights..... 14

Path/Area Lights.....15

Well/Recessed/Ground Lights..... 15

Capstone Lights.....15

Deck/Wash Lights.....16

Specialty Lights.....16

SPECIFICATIONS.....16-17



Directional Lights



MR-16 Bullet
CBL1CB / CBL1CBUSA

Solid bronze body, 8.5" bronze stake, 25' #16-2 No-Ox® Wire lead, use MR-16 (50W max.) not included. CBL1CBUSA is 96% made in the USA



MR-11 Bullet
CBL5CB

Copper shroud, solid bronze body, 6.5" bronze stake. 25' #16-2 No-Ox® Wire lead, use MR-11 (35W max.) not included



LED Bullet
CBLED141

Solid bronze body, shroud, and 7.5" stake, LED module has two light levels, 25' #16-2 No-Ox® Wire lead (equivalent to 35W & 50W halogen)



MR-16 Path/Area
CBAL1CB

Solid bronze, 25' #16-2 No-Ox® Wire lead, uses MR-16 (50W max.) not included, Large Talon Stake, 76% made in the USA

Downlights




Tree Light
CCTL2C

35' #16-2 No-Ox® Wire lead, copper hood, antique finish brass base, use MR-16 (50W max) not included. Tree Mount Hardware Included (CTREEH1)




Niche
CNL1CB


25' #18-2 No-Ox® Wire lead, copper hood, bronze base, 2.5W T5 LED lamp SL921T5200L (included)

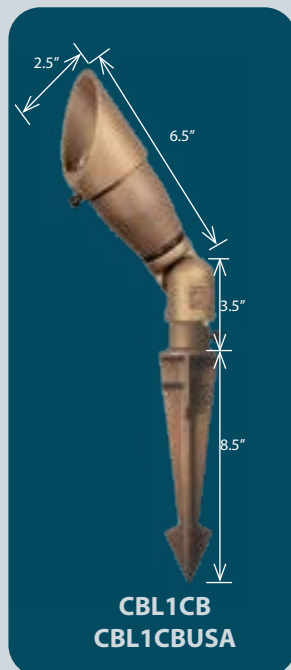


CBL1CB
CBL1CBUSA

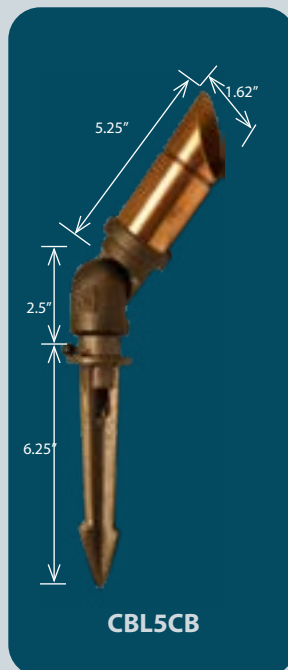


CBL5CB

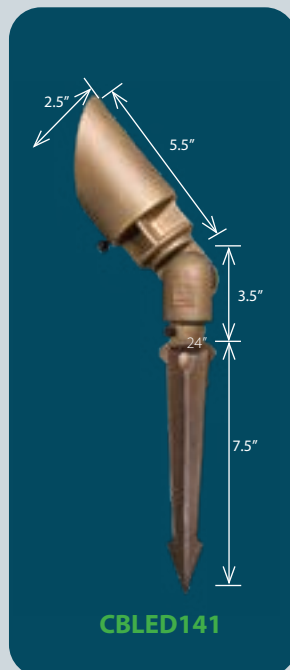


CBLED141

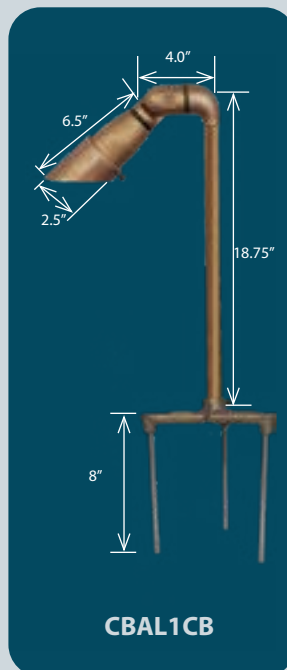

CBAL1CB

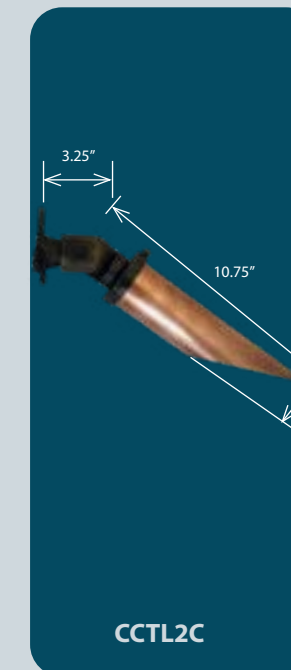

CCTL2C

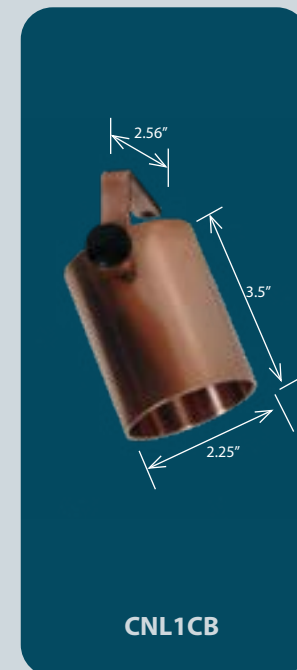

CNL1CB



Path/Area Lights



Mini-China Hat
CCH5CB / **CCH5LED1**

Solid bronze body, copper stem, bronze stake, 25' #16-2 No-Ox® Wire lead; includes 2.5W bi-pin LED (CCH5CB); or 3W integrated LED (**CCH5LED1**)



Small China Hat
CCH1CB, CCH13CB

Solid bronze, copper stem, bronze stake/mounting canopy, 25' #16-2 No-Ox® Wire lead, use 25W Max S8 socket, lamp not included, 95% made in the USA




Large China Hat
CCH2CB

Solid bronze, copper stem, large bronze talon stake, 35' #16-2 No-Ox® Wire lead, use 25W Max S8 socket, lamp not included, 95% made in the USA




Chelsea London
CCL1CB

Solid bronze, copper stem, large bronze talon stake, 35' #16-2 No-Ox® Wire lead, use 25W Max S8 socket, lamp not included, 76% made in the USA

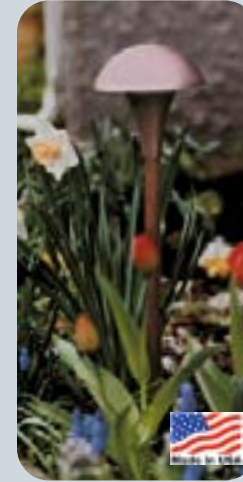


Small Mushroom
CMU1CB, CMU13CB

Solid bronze, copper stem, bronze stake/mounting canopy, 25' #16-2 No-Ox® Wire lead, use 25W Max S8 socket, lamp not included, 95% made in the USA

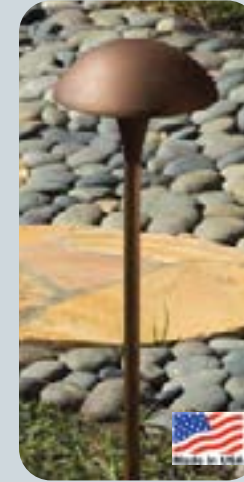

Large Mushroom
CMU2CB

Solid bronze, copper stem, large bronze talon stake, 35' #16-2 No-Ox® Wire lead, use 25W Max S8 socket, lamp not included, 95% made in the USA

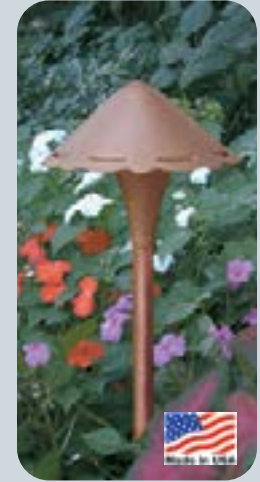


New Orleans
CNO1CB, CNO13CB

Solid bronze, copper stem, bronze stake/mounting canopy, 25' #16-2 No-Ox® Wire lead, use 25W Max S8 socket, lamp not included, 95% made in the USA



LED Path Light Modules

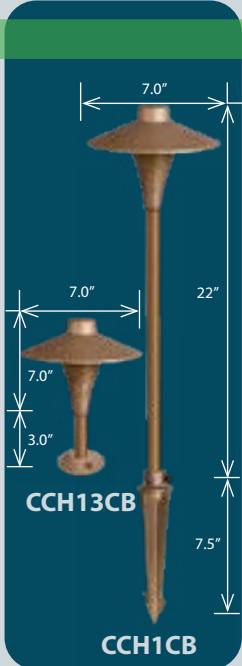

Path/Area Lights (Cont.)



Nouveau
CNOU2CB

Solid bronze, copper stem, large bronze talon stake, 35' #16-2 No-Ox® Wire lead, use 25W Max S8 socket, lamp not included, 85% made in the USA



Saratoga
CSR1CB

Solid bronze, copper stem, bronze stake, 25' #16-2 No-Ox® Wire lead, use 25W Max S8 socket, lamp not included, 95% made in the USA



Prairie
CPL1CB

Solid bronze, copper stem, large bronze talon stake, 25' #16-2 No-Ox® Wire lead, includes NEW GLARE FREE LED module (replaceable), 65% made in the USA



Savannah
CSA1CB / CSA1LED2

Solid bronze, copper stem, large bronze talon stake, 35' #16-2 No-Ox® Wire lead; includes 2.5W S8 LED lamp (CSA1CB); or replaceable CSWLED2 LED module (CSA1LED2)

Wall Lights




China Hat Wall Sconce
CCH5LED1SC

Includes mounting canopy, integrated LED, 25' #18-2 No-Ox® Wire lead






Engineered Wall
CEWL5CB / CEWL5LED1

Solid bronze body, copper bracket, 25' #18-2 No-Ox® Wire lead; includes 2.5W T5 LED lamp (CEWL5CB); integrated LED light source (CEWL5LED1)

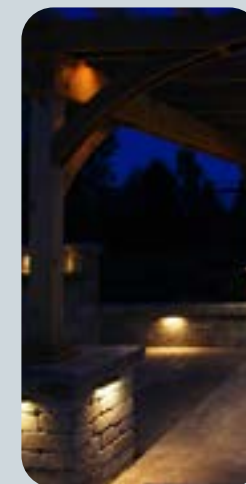

Engineered Wall Surface Mount
CEWL6CB / CEWL6LED1

Solid bronze body, copper bracket, 25' #18-2 No-Ox® Wire lead; includes 2.5W T5 LED lamp included (CEWL6CB); integrated LED light source (CEWL6LED1)

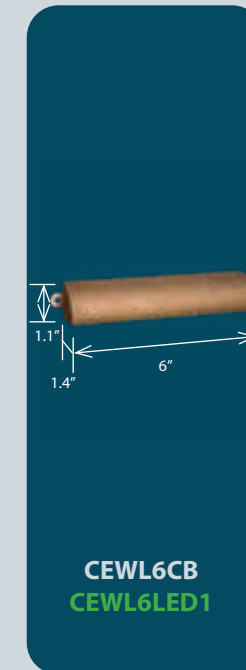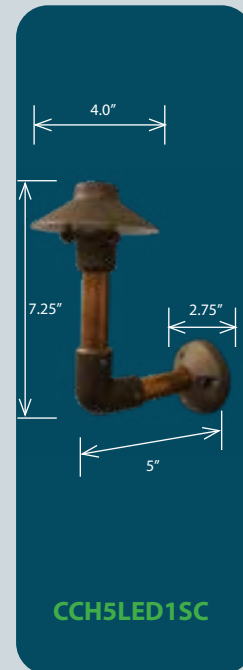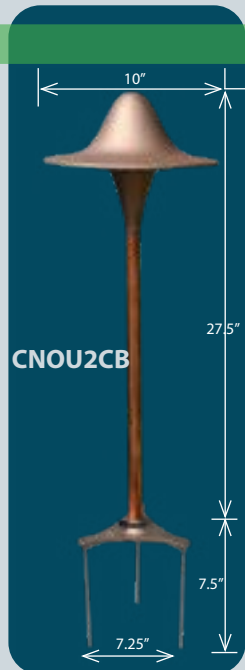

Deck Lights



Deck Light
CDL1CB/CDL1LED1

Solid bronze, 25' #18-2 No-Ox® Wire lead; 2.5W T5 LED lamp included (CDL1CB); 3W integrated LED Board, 2800K, 53Lm (CDL1LED1), 51% made in the USA



Savannah Deck
CDL2CB


Solid bronze, 25' #18-2 No-Ox® Wire lead, 2.5W T5 LED lamp included

Well Lights



Well
CWNOLAMP

25' #16-2 No-Ox® Wire lead, PVC body, use PAR 36, not included (50W max.), 100% made in the USA

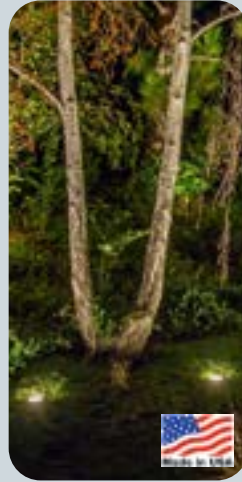

MR-16 Well
CWLMR16/CWLMR16G



25' #12-2 No-Ox® Wire lead, PVC body, solid bronze interior, use MR-16, 50W max (not included), 80% made in the USA

Wall Wash



Wall Wash
CWW1CB

Solid bronze, glass lens, 25' #18-2 No-Ox® Wire lead; 2.5W S8 LED lamp included

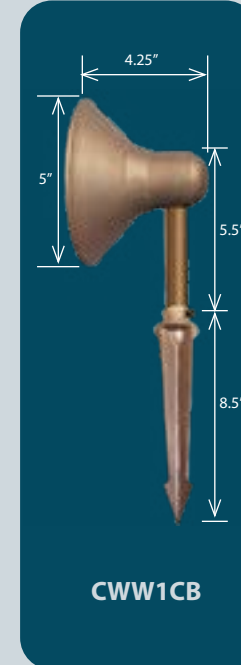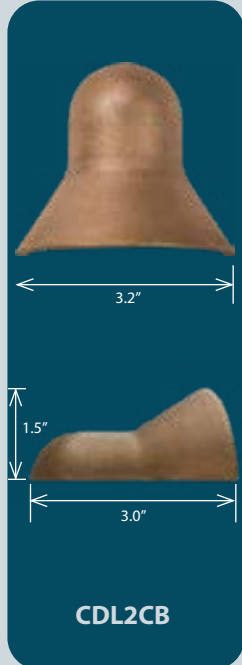

Path Lights



Path

CCPL2B/CCPL2BL

Solid bronze, copper stem, 5' #18-2 No-Ox® Wire lead; integrated 2-LED source with fully potted driver (**CCPL2B**); replaceable bi-pin LED lamp, included (**CCPL2BL**), 67% made in the USA



Borneo

CCPLBOB/CCPLBOBL

Solid bronze, copper stem, 5' #18-2 No-Ox® Wire lead; integrated 2-LED source with fully potted driver (**CCPLBOB**); replaceable bi-pin LED lamp, included (**CCPLBOBL**), 70% made in the USA



Cabana

CCPLCAB / CCPLCABL


Solid bronze, copper stem, 5' #18-2 No-Ox® Wire lead; integrated 2-LED source with fully potted driver (**CCPLCAB**); replaceable bi-pin LED lamp, included (**CCPLCABL**), 70% made in the USA




China Hat

CCPLCHB / CCPLCHBL


Solid bronze, copper stem, 5' #18-2 No-Ox® Wire lead; integrated 2-LED source with fully potted driver (**CCPLCHB**); replaceable bi-pin LED lamp, included (**CCPLCHBL**), 67% made in the USA

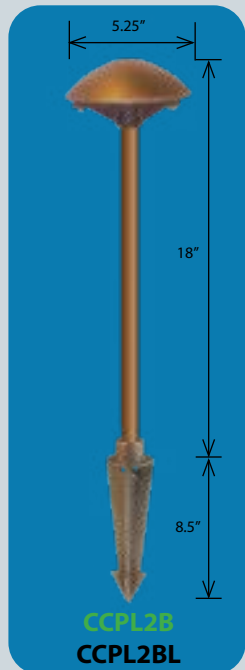


**CCPL2B
CCPL2BL**

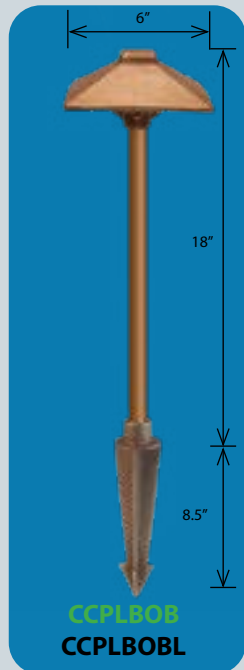

**CCPLBOB
CCPLBOBL**

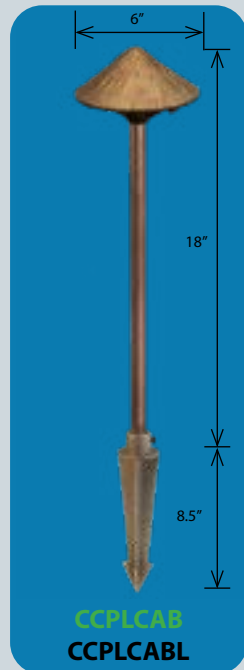

**CCPLCAB
CCPLCABL**

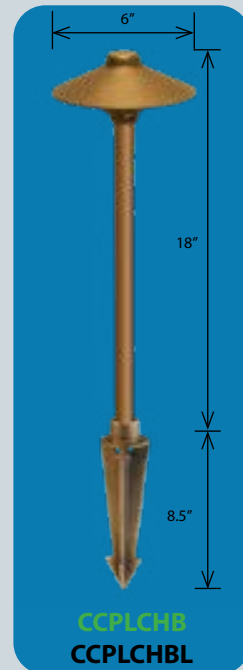

**CCPLCHB
CCPLCHBL**


Directional



Bronze Spot/Wash Light


CCSL10536B, CCSL18336B, CCSL18354B, CCSL25036B, CCSL25054B, CCW105B, CCW270B

Bronze body and stake, 5' #18-2 No-Ox® Wire lead, integrated single-LED with fully potted driver

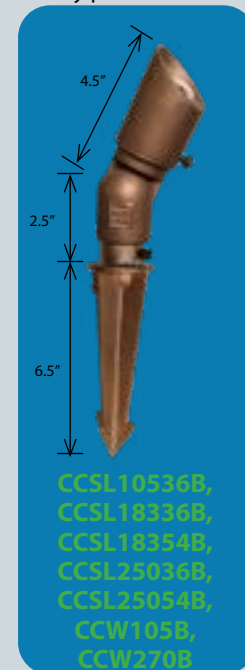

**CCSL10536B,
CCSL18336B,
CCSL18354B,
CCSL25036B,
CCSL25054B,
CCW105B,
CCW270B**


Deck/Wall

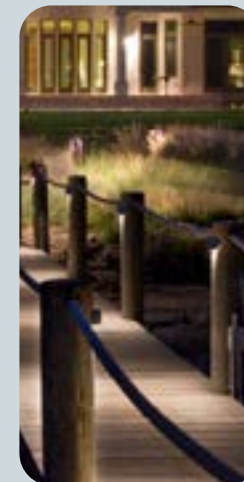

Bronze Deck Light

CCDL1BFG

Bronze body with integrated single-LED source and fully potted driver. Shroud is secured with stainless steel set screw, 5' #18-2 No-Ox® Wire lead

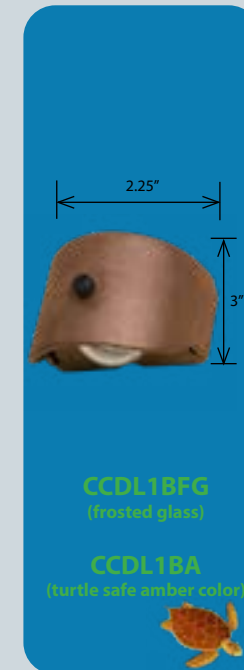

CCDL1BFG
(frosted glass)

CCDL1BA
(turtle safe amber color)




Well/Ground



Ground Light

CCGL18336B, CCGL25036B, CCGL105WB

Solid bronze body and base with stainless steel pins (3) to stake to ground for fast, easy installation, 5' #18-2 No-Ox® Wire lead

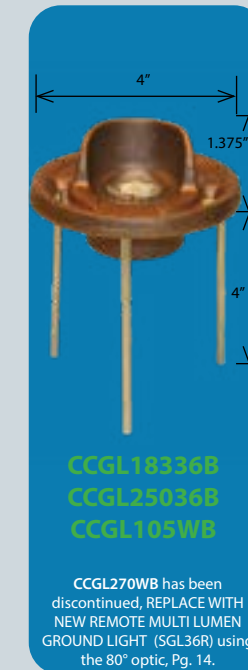

**CCGL18336B
CCGL25036B
CCGL105WB**

CCGL270WB has been discontinued, REPLACE WITH NEW REMOTE MULTI LUMEN GROUND LIGHT (SGL36R) using the 80° optic, Pg. 14.



SOLID SAND-CAST BRONZE...BUILT TO LAST FOREVER

Part #	Voltage Range (AC/DC)	Total Lumens	Watts (Cost to Operate)	Volt Amps	CCT	Halogen Equivalent (Watts)	No-Ox® Lead Wire Length
Area/Path Lights							
CCL1CB w/CALED2	10-24	116	4.42	4.91	2800 +/-	N/A	35 ft.
CSR1CB w/CALED2	10-24	116	4.42	4.91	2800 +/-	N/A	25 ft.
CNO1CB w/CALED2	10-24	129	4.42	4.91	2800 +/-	N/A	25 ft.
CNO13CB w/CALED2	10-24	129	4.42	4.91	2800 +/-	N/A	25 ft.
CSA1LED2	10-24	200	4.42	4.91	2800 +/-	N/A	35 ft.
CCH1CB w/CALED2	10-24	82	4.42	4.91	2800 +/-	N/A	25 ft.
CCH13CB w/CALED2	10-24	82	4.42	4.91	2800 +/-	N/A	25 ft.
CCH2CB w/CALED2	10-24	116	4.42	4.91	2800 +/-	N/A	35 ft.
CMU1CB w/CALED2	10-24	131	4.42	4.91	2800 +/-	N/A	25 ft.
CMU2CB w/CALED2	10-24	104	4.42	4.91	2800 +/-	N/A	35 ft.
CMU13CB w/CALED2	10-24	104	4.42	4.91	2800 +/-	N/A	25 ft.
CCH5LED1	10-24	58	2.71	3.23	2800 +/-	N/A	25 ft.
CCPL2B, CCPLCHB, CCPLBOB, CCPLCAB, Integrated LED	10-24	114	4.22	4.74	2800 +/-	N/A	5 ft.
CCPL2BL, CCPLCHBL, CCPLBOBL, CCPLCABL Drop-In LED included	10-20	250	2.5	3.0	2800 +/-	N/A	5 ft.
Directional Lights							
CBLED141	10-24	328 high/269 low	9.25 high/5.86 low	9.84 high/6.3 low	2800 +/-	50 high/35 low	25 ft.
CCSL10536B	10-24	89	2.82	3.2	2800 +/-	10	5 ft.
CCSL18336B	10-24	153	2.68	3.08	2800 +/-	20	5 ft.
CCSL18354B	10-24	153	2.68	3.08	2800 +/-	20	5 ft.
CCSL25036B	10-24	229	4.3	5.24	2800 +/-	35	5 ft.
CCSL250254B	10-24	229	4.3	5.24	2800 +/-	35	5 ft.
CWW105B	10-24	49	2.82	3.2	2800 +/-	20	5 ft.
CCW270B	10-24	164	4.33	4.81	2800 +/-	20	5 ft.
CTLED141	10-24	157 low/269 high	4.1 low/5.86 high	4.41 low/6.3 high	2800 +/-	20 low/35 high	35 ft.




LANDSCAPE®

OLD WORLD CRAFTSMANSHIP...TOMORROW'S TECHNOLOGY®


Part #	Voltage Range (AC/DC)	Total Lumens	Watts (Cost to Operate)	Volt Amps	CCT	Halogen Equivalent (Watts)	No-Ox® Lead Wire Length
Deck/Wall/Wash Lights							
CDL1LED1	10-24	89	2.82	3.2	2800 +/-	20	25 ft.
CCDL1CB	10-24	49	2.88	3.27	2800 +/-	10	5 ft.
CWW1LED2	10-24	148	4.33	4.81	2800 +/-	20	25 ft.
CEWL5LED1	10-24	76	2.5	2.84	2800 +/-	20	25 ft.
CEWL6LED1	10-24	76	2.5	2.84	2800 +/-	20	25 ft.
CDL2CB	10-24	49	2.88	3.27	2800 +/-	10	25ft.
Ground Lights							
CCGL18336B	10-24	153	2.69	3.06	2800 +/-	20	5 ft.
CCGL125036B	10-24	229	4.3	5.24	2800 +/-	35	5 ft.
CCGL105WB	10-24	49	2.82	3.2	2800 +/-	10	5 ft.



CAST - LANDSCAPE & SOURCE ACCESSORIES

				Reference	Description
 CWNOLAMP, CWNLNLNW	 CWLG1CB	 CWLR1CB	 CWLG2CB	A	Well Light with Gimble Ring
				B	Well Light Grate
				C	Well Light Lens & Bronze Ring
				D	Well Light Grate with Opening
 CTREEH1, CTREEH24	 CHMS1CB	 CLMS1CB	 CMS1CB	E	Stainless Steel Tree Mount Hardware
				F	Heavy Duty Mounting Stake
				G	Long Solid Bronze Set-In-Stake
				H	Standard Solid Bronze Set-In-Stake
 CSS1	 CTS1CB	 CCPC1	 CCPL1, CCPT1, CCPSTEM...	I	Spider Splice® Box Assembly
				J	Large Bronze Talon Set-In-Stake
				K	Path/Bullet Telescopic Stem Extensions
				L	Set-In-Stake Custom Riser System
 CMFSA	 XCBPTMC1	 CFM1CBS	 SFM1	M	Floor Mount Stem Assembly
				N	Tree Mounting Canopy
				O	Set-In-Stake Mounting Canopy
				P	SOURCE Threaded Mounting Canopy
 CXL1, CXL2	 C61335	 CSISC	 CSIS	Q	MR-16 Honeycomb Louver
				R	20-Amp Waterproof Wire Nut
				S	Set-In-Stone® Flexible Conduit 82' Roll
				T	Set-In-Stone® Mounting Module


CAST - LANDSCAPE & SOURCE ACCESSORIES

U  XC BPTA2	V  XC BPTLTA	W  C TESTS8	X  C TESTMR16
Y  *See page 9.	Z  CSPIN	AA  C4WAY	AB  CASTRIP1
AC  CCRIMPCUT CCRIMP	AD  CHS14100 CHS3850 CHS1250C (clear)	AE  #12-10 #16-14 CLWSP10B, CLWSP14B AF  #12-10 #16-14 CLWSB10B, CLWSB14B	AG  *See page 13.
AH  CPK2	AI  CLWSK	AJ  CTDTCASTRO	AK  CTTC
AL  CTDTC	AM  CTRPC/CTPC	AN  SMGB1	AO  CBLMOD141, CBLMOD121, CBLMOD112, CTLMOD141

Reference	Description
U	1/2" FPT Brass Transition Adapter
V	1/2" MPT Tree Light Transition Adapter
W	S8 Voltage Testing Tool
X	MR-16 Voltage Testing Tool
Y	No-Ox [®] Tin-Coated Marine-Grade Wire
Z	Wire Spinner Dispenser
AA	8-Bit Screwdriver
AB	Ideal Automatic Wire Stripper
AC	Wire Crimping Tools
AD	Heat Shrink with Internal Sealant
AE	Parallel Wire Splice Crimp Connector
AF	Butt Wire Splice Crimp Connector
AG	Low-Voltage Power Supply
AH	Contractor Parts Kit
AI	Wire Repair Splice Kit
AJ	Astronomical Digital Time Clock
AK	Plug-In Time Clock
AL	Digital Time Clock
AM	Remote/Plug-In Photocell
AN	Gutter Mount Bracket*
AO	Replacement Modules for Integrated Bullet & Tree Lights

*Requires item "V" (XC BPTLTA) for Set-In-Stake[®] mounts.

MR-16 Lamps - Quickly Identify Lumen Level & Beam Angle

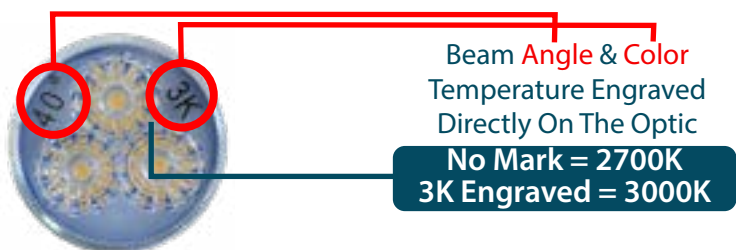

COLOR-CODED & ENGRAVED FOR EASY IDENTIFICATION DURING & AFTER INSTALLATION

RED = 10 WATT

GREEN = 20 WATT

Halogen Equivalents

BLUE = 35 WATT

BLACK = 50 WATT

WHITE = 75 WATT



1 WATT LED



2 WATT LED



4 WATT LED



5 WATT LED



6 WATT LED

Lamp Body Color	Lamp Code	Beam from Fixture		Halogen Equiv.	Voltage Input	Color Temp. CCT/CRI	Amps	Power Factor	Volt Amp (to size)	Factory Lumen	Lumen Output Enclosed Fixture	Rated Hours
 WHITE 6 WATT	SLMR166XXW27	XX-Wide	80°	75 Watt	10-24V AC/DC	2700°K 83 CRI	0.706	0.717	8.49	720	213	50,000
	SLMR166XW27	X-Wide	55°				0.706	0.717	8.49		440	
	SLMR166W27	Wide	40°				0.706	0.717	8.49		527	
	SLMR166M27	Medium	30°				0.706	0.717	8.49		575	
	SLMR166N27	Narrow	20°				0.706	0.717	8.49		559	
	SLMR166XW30	X-Wide	55°			3000°K 83 CRI	0.762	0.66	9.0		534	
	SLMR166W30	Wide	40°				0.745	0.66	9.0		557	
	SLMR166M30	Medium	30°				0.76	0.66	9.0		585	
	SLMR166N30	Narrow	20°				0.76	0.66	9.0		569	
	SLMR165XXW27	XX-Wide	80°	50 Watt	10-24V AC/DC	2700°K 83 CRI	0.542	0.7	6.56	540	175	50,000
 BLACK 5 WATT	SLMR165XW27	X-Wide	55°				0.542	0.7	6.56		392	
	SLMR165W27	Wide	40°				0.542	0.7	6.56		419	
	SLMR165M27	Medium	30°				0.542	0.7	6.56		421	
	SLMR165N27	Narrow	20°				0.542	0.7	6.56		381	
	SLMR165XW30	X-Wide	55°			3000°K 83 CRI	0.67	0.66	7.45		426	
	SLMR165W30	Wide	40°				0.67	0.66	7.45		456	
	SLMR165M30	Medium	30°				0.67	0.66	7.45		435	
	SLMR165N30	Narrow	20°				0.67	0.66	7.45		393	
 BLUE 4 WATT	SLMR164XXW27	XX-Wide	80°	35 Watt	10-24V AC/DC	2700°K 83 CRI	0.387	0.691	4.67	390	199	50,000
	SLMR164XW27	X-Wide	55°				0.387	0.691	4.67		299	
	SLMR164W27	Wide	40°				0.387	0.691	4.67		304	
	SLMR164M27	Medium	30°				0.387	0.691	4.67		305	
	SLMR164N27	Narrow	20°				0.387	0.691	4.67		267	
	SLMR164XW30	X-Wide	55°			3000°K 83 CRI	0.435	0.637	5.26		310	
	SLMR164W30	Wide	40°				0.435	0.637	5.26		322	
	SLMR164M30	Medium	30°				0.435	0.637	5.26		315	
	SLMR164N30	Narrow	20°				0.435	0.637	5.26		278	

*MR-16 Products Covered by PATENT #10,876,706

MR-16 Lamps - Quickly Identify Beam Angle & Lumen Level!


Lamp Body Color	Lamp Code	Beam from Fixture		Halogen Equiv.	Voltage Input	Color Temp. CCT/CRI	Amps	Power Factor	Volt Amp (to size)	Factory Lumen	Lumen Output Enclosed Fixture	Rated Hours
 GREEN 2 WATT	SLMR162XXW27	XX-Wide	80°	20 Watt	10-24V AC/DC	2700°K 83 CRI	0.236	0.664	2.83	300	128	50,000
	SLMR162XW27	X-Wide	55°				0.236	0.664	2.83		183	
	SLMR162W27	Wide	40°				0.236	0.664	2.83		189	
	SLMR162M27	Medium	30°				0.236	0.664	2.83		193	
	SLMR162N27	Narrow	20°				0.236	0.664	2.83		167	
	SLMR162XW30	X-Wide	55°			3000°K 83 CRI	0.25	0.66	3.0		197	
	SLMR162W30	Wide	40°				0.25	0.66	3.0		196	
	SLMR162M30	Medium	30°				0.25	0.66	3.0		202	
	SLMR162N30	Narrow	20°				0.25	0.66	3.0		177	
 RED 1 WATT	SLMR161XXW27	XX-Wide	80°	10 Watt	10-24V AC/DC	2700°K 83 CRI	0.139	0.63	1.69	240	74	50,000
	SLMR161XW27	X-Wide	55°				0.139	0.63	1.69		106	
	SLMR161W27	Wide	40°				0.139	0.63	1.69		104	
	SLMR161XXW30	XX-Wide	80°			3000°K 83 CRI	0.139	0.66	1.69		80	
	SLMR161XW30	X-Wide	55°				0.139	0.66	1.69		112	

Bluetooth Color Control MR-16 Lamp


Color When You Want It... White When You Don't! Part of our complete line of Bluetooth Color Control Products!

Lamp Body Color	Lamp Code	Beam from Fixture		Voltage Input	Color Temp. CCT/CRI	Amps	Power Factor	Volt Amp (to size)	Factory Lumens @2800°K	Factory Lumens @6000°K	Rated Hours
 ORANGE 5 WATT	SLMR165WBT	Wide	40°	9-15V AC/24V DC	2700°/ 83 CRI	0.542	0.70	6.56	300Lm	332Lm	30,000

Most Popular Applications for SOURCE MR-16 Lamps

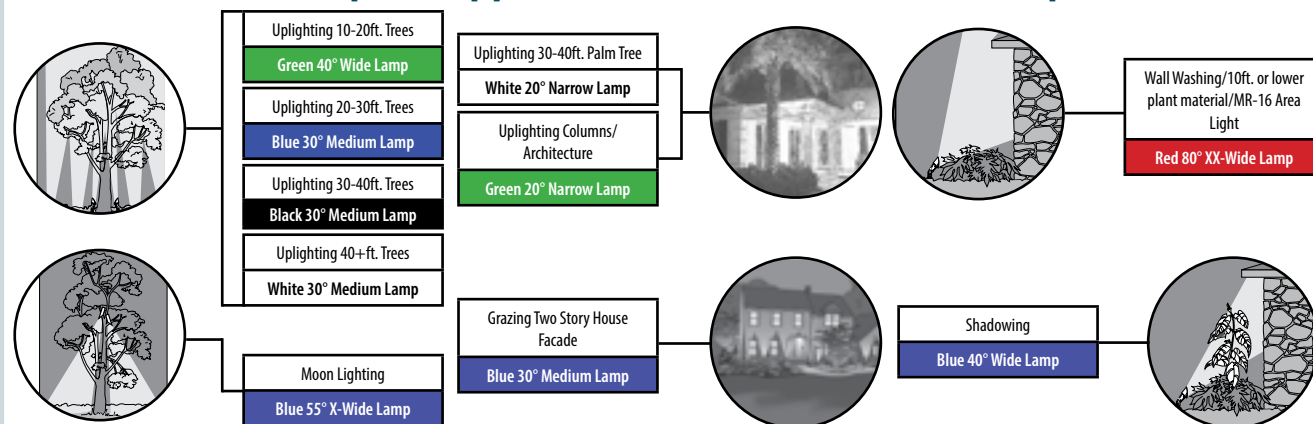

Flag Poles, Columns, Palm Trees House Facade/Grazing General Purpose Uplighting

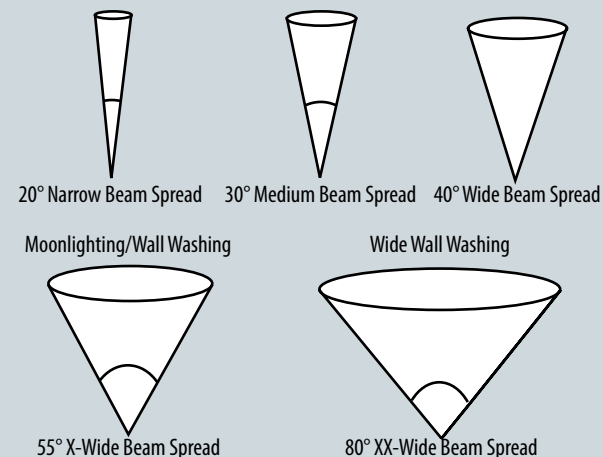

MR-11 Lamps - Quickly Identify Beam Angle & Lumen Level!

	Beam from Fixture		Halogen Equiv.	Lamp Body Color	Voltage	Color Temp. CCT/CRI	Amps	Factory Lumen	Lumen Output Enclosed Fixture	Rated Hours
SLMR112XW27	X-Wide	55°	20 Watt	Green 2W	10-15V AC/DC	2750°K	0.21	186	149	50,000
SLMR112W27	Wide	40°					0.21		148	
SLMR112N27	Narrow	20°					0.21		144	

LED Mini Lamps

	Lamp Code	Description	Watts	Operating Range	Factory Lumen	Color Temperature	Rated Hours	Used With
	SLBP250L	GY6.35 Bi-Pin Base LED	2.5	9-20V	250	2750°K	25,000	Can be used with CCH5CB (with Bi-Pin Socket) & CCH5LED1 (original non-integrated with Bi-Pin Socket)
	SLSCB250L	Single Contact Bayonet LED	2.5	9-20V	250	2750°K	25,000	Can be used with the following CAST fixtures manufactured with a SCB Socket: CCH5CB, CCH5LED1, Classic Path Lights, CNL1CB, & CDL1CB. Generally manufactured before July 2007.
	SL921T5200L	921 T5 Wedge Base LED	2	9-15V	200	2750°K	25,000	Can be used with CDL1CB, CDL2CB, CNL1CB, CEWL5CB & CEWL6CB
	SL3156250L	3156 S8 Wedge Base LED	2.5	9-20V	250	2750°K	25,000	Can be used with Classic Path Lights with an S8 Wedge Base Socket

LED Retrofit Modules for CAST Landscape Classic Area/Path Lights

For an outstanding glare-free light source, use these Retrofit Modules to convert CAST Path Lights to LED. The Bluetooth Module (CALED2BT) will convert your CAST Classic Path Lights to work with our Bluetooth Color Control System.

Color When You Want It...
White When You Don't!

Part of our
Bluetooth Color Control System!

CALED2BT



CALED2



CALED2A



*CALED2BT, CALED2, CALED2A used with CCH13CB, CCH1CB, CCH2CB, CCL1CB, CMU13CB, CMU1CB, CMU2CB, CNO13CB, CNO1CB, CNOU2CB, and CSR1CB.
CALED2A is Turtle-Safe Amber LED.

CAST LOW VOLTAGE MULTI-TAP TRANSFORMERS



CAST Master Series®



CAST Journeyman® Series



CJ300SSPC

The transformer is the heart of every landscape lighting system. CAST transformers represent the state-of-the-art in materials, design, and performance.

JOURNEYMEN & MASTER SERIES

- Resin Sealed Toroid Core - Not Air-Cooled EI Type
- Tin-Coated Internal Wiring Rated to 125°C
- Durable 304 Stainless Steel Enclosure
- Dedicated Wire Loop for Testing Primary Load
- Secondary Magnetic Circuit Breakers, Core Thermal Cut-Off
- Quick-Connect Photocell and Time Clock Options
- Oversized 125 Amp Terminal Lugs, 12V to 15V Taps
- Drop-Down Bottom Panel Knockouts

BUDGET-FRIENDLY TRANSFORMERS

- **CJ300SSPC:** Built-in photocell, on-at-dusk/off-at 1-9 hours after dusk, manual on/off with dusk-till-dawn setting, 12V & 15V tap, AC voltage.
- **CJT75SSMTTC:** 75W Dual-Tap, built-in manual timer, resin-sealed toroidal core, voltage taps of 12V & 15V with optional 20V, secondary magnetic circuit breaker 6amp, photocell compatible.

CAST MULTI-TAP TRANSFORMERS

Model	Watts	Voltage Taps
Master Series - Stainless Steel, Extra Common		
CM900SSMT	900	12-18
CM1200SSMT	1200	12-18
Journeyman Series - Stainless Steel		
CJT150SSMT	150	12-15
CJ300SSMT	300	12-15
CJ600SSMT*	600	12-15
CJ900SSMT	900	12-15
Budget-Friendly Transformers		
Stainless Steel Transformer - with Built-In Photocell and Off Delay		
CJ300SSPC	300	12V, 15V
Mini Stainless Steel Transformer - with Internal Time Clock		
CJT75SSMTTC	75	12V, 15V
TRANSFORMER ACCESSORIES		
Model	Description	
CTTC	Manual Time Clock	
CTDTC*	Digital Time Clock	
CTPC*	Photocell	
CTRPC	Remote Photocell	

*220/240V Models Available

CAST LIGHTING NO-OX® TIN-COATED MARINE-GRADE WIRE



The outdoor environment corrodes ordinary copper wire; CAST Lighting tin-coated marine-grade wire resists corrosion and maintains system integrity.

- Tin-coated for corrosion resistance
- Direct burial, stranded, for low voltage lighting
- Descending footage markings on wire

CAST Lighting No-Ox® Tin-Coated Marine-Grade Wire is UL listed for the US and Canada.

Made in the USA


CAST LIGHTING NO-OX® WIRE*

Model	Gauge	Feet
CLW162500	#16-2	500'
CLW142500	#14-2	500'
CLW122500	#12-2	500"
CLW102250	#10-2	250'
CLW122250	#12-2	250'
CLW102500	#10-2	500'
CLW82500	#8-2	500'

*Wire is printed with remaining feet.

Bluetooth Color Control - Color When You Want It...White When You Don't

SPOT

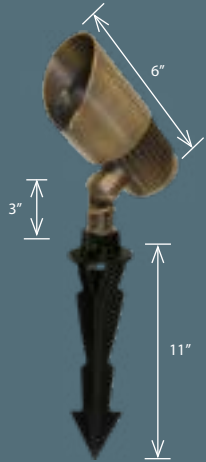

Bluetooth Color Control Spot
SBLBTC1


WASH



Bluetooth Color Control Wall Wash
SWLBTC1

CAPSTONE

Bluetooth Color Control Capstone
SEWL1BT




SET-IN-STONE®
MODULE (CSIS)



For optimal installation in stone walls, use Set-In-Stone® Mounting System to prevent wire damage and simplify maintenance.
Patent #: 8, 627, 609; 8, 464, 492; D649, 695 S

RANGE EXTENDER

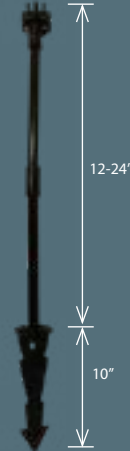

Bluetooth Color Control Range Extender
SBLBTR

PATH LIGHT MODULE




Bluetooth Color Control Path Light Module
CALED2BT

MR-16 LAMP



Bluetooth Color Control MR-16
20W Halogen Equivalent Lamp
SLMR165WBT

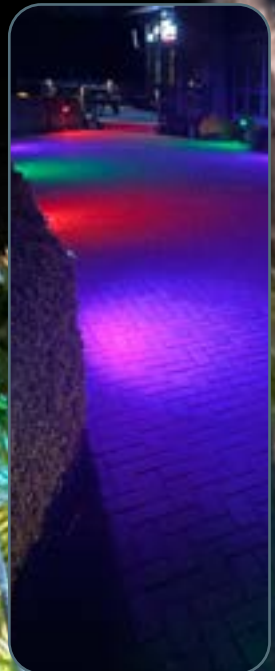

IR Remote Multi Lumen



IR Remote Multi Lumen Spot
SBML36R




IR Remote Multi Lumen Wall Wash
SWML3R




IR Remote Multi Lumen Ground Light
SGL36R
Replaces Craftsman CCG1270WB using the 80° Optic!

Multi Lumen

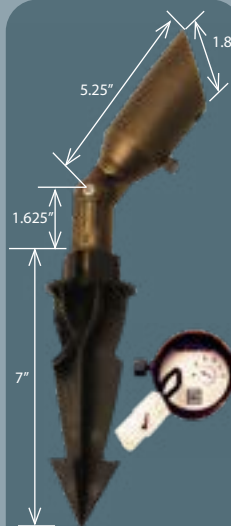


SBML SERIES
SBML15, SBML24, SBML36, SBML363K, SBML60, SBMLW

Directional MR-16

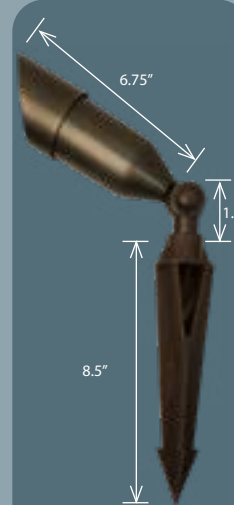

MR-16 Spot
SBL20

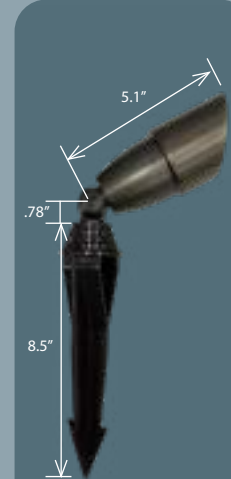



MR-16 Economy Spot
SBL10

Directional Integrated



4.5 Watt
SSPK45
8.5 Watt
SSPK85
12.5 Watt
SSPK12




Path & Area Lights

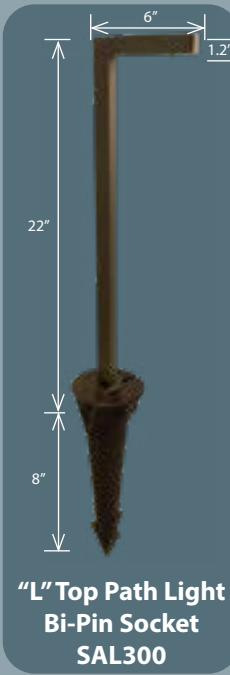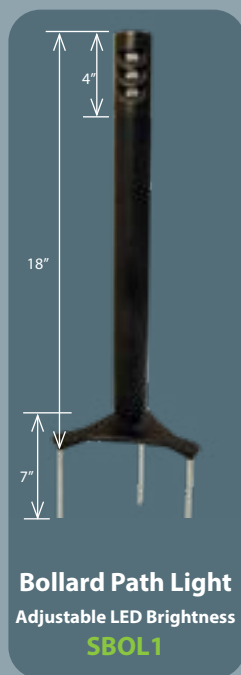


Well/Recessed/Ground



Capstone Lights

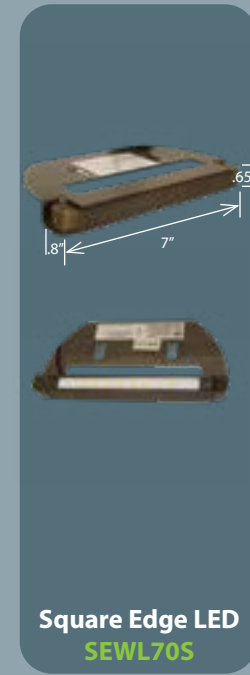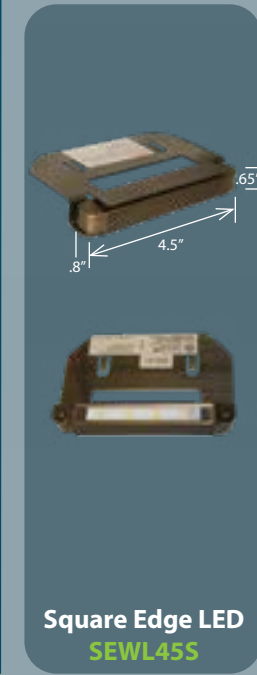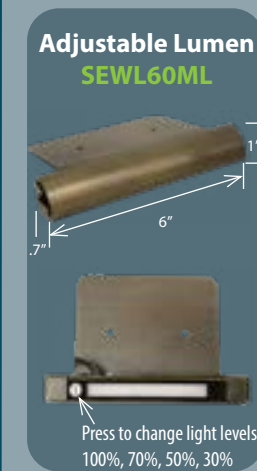

Deck/Wash Lights

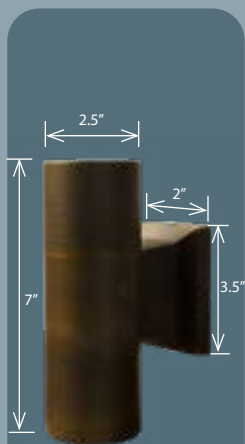

**Sconce MR-16
Up & Down Light
SPL1**



**Deck Light
Bi-Pin Socket
SDL20**




**Mini Flood/Wash
Light
Bi-Pin Socket
SFL10**



**MR-16 Large Flood/
Wash Light
SFL20**

Specialty Lights

Available in
2700K & 3000K
and 3-piece kits

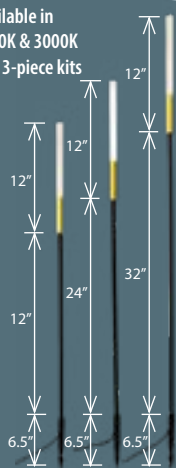

Bamboo Lights
SBBL24, SBBL243K,
SBBL36, SBBL363K,
SBBL44, SBBL443K
3-Piece Kits:
SBBL234, SBBL2343K



**MR-16
Underwater Light
SUL20**

Bluetooth Color Control SPECIFICATIONS

Testing Done At Full Power	Beam	Voltage Range (AC/DC)	Total Lumens	Watts (Cost To Operate)	Volt Amps	CCT
SBLBTC1-White 2700K	36	12-15V	342	10.3	13.802	2500K - 6500K
SBLBTC1-Green	36	12-15V	249	10.7	14.338	N/A
SBLBTC1-Red	36	12-15V	133	9.26	12.4084	N/A
SBLBTC1-Blue	36	12-15V	47	10.3	13.802	N/A
SWLBTC1-White 2700K	20x80	12-15V	528.37	10.37	13.90	2500K - 6000K
SWLBTC1-Green	20x80	12-15V	316.88	10.31	13.82	N/A
SWLBTC1-Red	20x80	12-15V	191.05	10.7	14.34	N/A
SWLBTC1-Blue	20x80	12-15V	121.43	10.04	13.45	N/A
SEWL1BT-White 2700K	80	12-15V	262.78	4.01	5.37	2700K
SEWL1BT-Green	80	12-15V	188.16	3.74	5.01	N/A
SEWL1BT-Red	80	12-15V	93.42	4.17	5.59	N/A
SEWL1BT-Blue	80	12-15V	42.96	3.92	5.25	N/A
CALED2BT-White 2700K	N/A	12-15V	342.75	4.94	6.62	2700K - 6000K
CALED2BT-Green	N/A	12-15V	287.79	5.02	6.73	N/A
CALED2BT-Red	N/A	12-15V	135.63	4.66	6.24	N/A
CALED2BT-Blue	N/A	12-15V	144.41	4.88	6.54	N/A

Path Light SPECIFICATIONS

	Voltage Range (AC/DC)	Watts (Cost To Operate)	Volt Amps	Beam	Lumens	CCT
SBOL1	10-24V	3	3.5	4.02	280	2700K

Recessed Lights SPECIFICATIONS

	Voltage Range (AC/DC)	Watts (Cost To Operate)	Volt Amps	Beam	Lumens	CCT
SRUL8	12-15V	8	10.6	35/15 tilt	640	3000K
SRULNS	12-15V	1	1.45	35	110	3000K
SRULW	12-15V	0.5	0.7	80	55	3000K
SRDWL	12-15V	3	3.89	2X60	110	3000K
SRULMS90	12-15V	0.5	0.7	20/90	40	3000K

Specialty Lights SPECIFICATIONS

	Voltage Range (AC/DC)	Watts (Cost To Operate)	Volt Amps	Beam	Lumens	CCT
SBBL24, SBBL36 & SBBL44	12-15V	2	2.6	120	75	2700K
SBBL243K, SBBL363K & SBBL443K	12-15V	2	2.6	120	80	3000K

*GREEN TEXT INDICATES MODULAR / INTEGRATED LED

SBML Spot and IR Remote Spot Light SPECIFICATIONS

Light Output Lumens / Beam Spread

			Optional Optic Part#		SMLO15	SMLO24	SMLO36 (Included)	SMLO60	SMLO80	CCT
	Power Setting	Voltage Range (AC/DC)	Watts (Cost To Operate)	Volt Amps	15°	24°	36°	60°	80° Wash	
SBML & SBML36R 35W Halogen Equivalent	#4	12-15V	3.02	3.85	260	255	250	215	210	2800K
SBML & SBML36R 30W Halogen Equivalent	#3	12-15V	2.25	2.93	200	195	190	163	160	2800K
SBML & SBML36R 20W Halogen Equivalent	#2	12-15V	1.5	2.01	138	135	130	130	128	2800K
SBML & SBML36R 10W Halogen Equivalent	#1	12-15V	0.77	1.07	86	85	80	70	68	2800K

Integrated LED Spot Light SPECIFICATIONS

	Voltage Range	Watts (Cost To Operate)	Volt Amps	Beam	Lumens	CCT	CRI	IP
SSPK45	12-15VAC	4.5	6	35°	450	3000K	85	66
SSPK85	12-15VAC	8.5	11	35°	850	3000K	85	66
SSPK12	12-15VAC	12.5	17	35°	1375	3000K	85	66

Wash Light SPECIFICATIONS

	Power Setting	Voltage Range (AC/ DC)	Watts (Cost To Op- erate)	Volt Amps	Beam	Lumens	CCT
SWML3R	#5	12-15V	11	13.75	20 x 80	687	2700K
SWML3R	#4	12-15V	9	11.25	20 x 80	592	2700K
SWML3R	#3	12-15V	6	7.5	20 x 80	426	2700K
SWML3R	#2	12-15V	3	3.75	20 x 80	214	2700K
SWML3R	#1	12-15V	1.5	1.875	20 x 80	93	2700K

Wall Light SPECIFICATIONS

	Power Setting	Voltage Range (AC/ DC)	Watts (Cost To Op- erate)	Volt Amps	Beam	Lumens	CCT
SEWL60ML	#4 100%	10-24V	2.5	3.35	120	80	2700K
SEWL60ML	#3 70%	10-24V	1.75	2.35	120	55	2700K
SEWL60ML	#2 50%	10-24V	1.25	1.68	120	40	2700K
SEWL60ML	#1 30%	10-24V	0.75	1.01	120	25	2700K
SEWL60R	FIXED	10-24V	3	4.02	120	120	2700K
SEWL45S	FIXED	10-15V	1.1	1.47	120	60	2700K
SEWL70S	FIXED	10-15V	3	4.02	120	120	2700K



We Cover All Your Landscape Lighting Needs

Unmatched Durability, Endless Solutions, Unwavering Support, Competitive Pricing



www.cast-lighting.com



973-423-2303



info@cast-lighting.com

LSRG - 6.2024