

# Lighting Specification Sheet


Classic MR-16 Well Light w/ Grate - CWLMR16G



Old world craftsmanship...tomorrow's technology®

Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Specifier: \_\_\_\_\_

Must operate lamp between 10.5 -12.0 volts. Optimal range is 10.8 to 11.3. Check voltage with digital multi-meter.

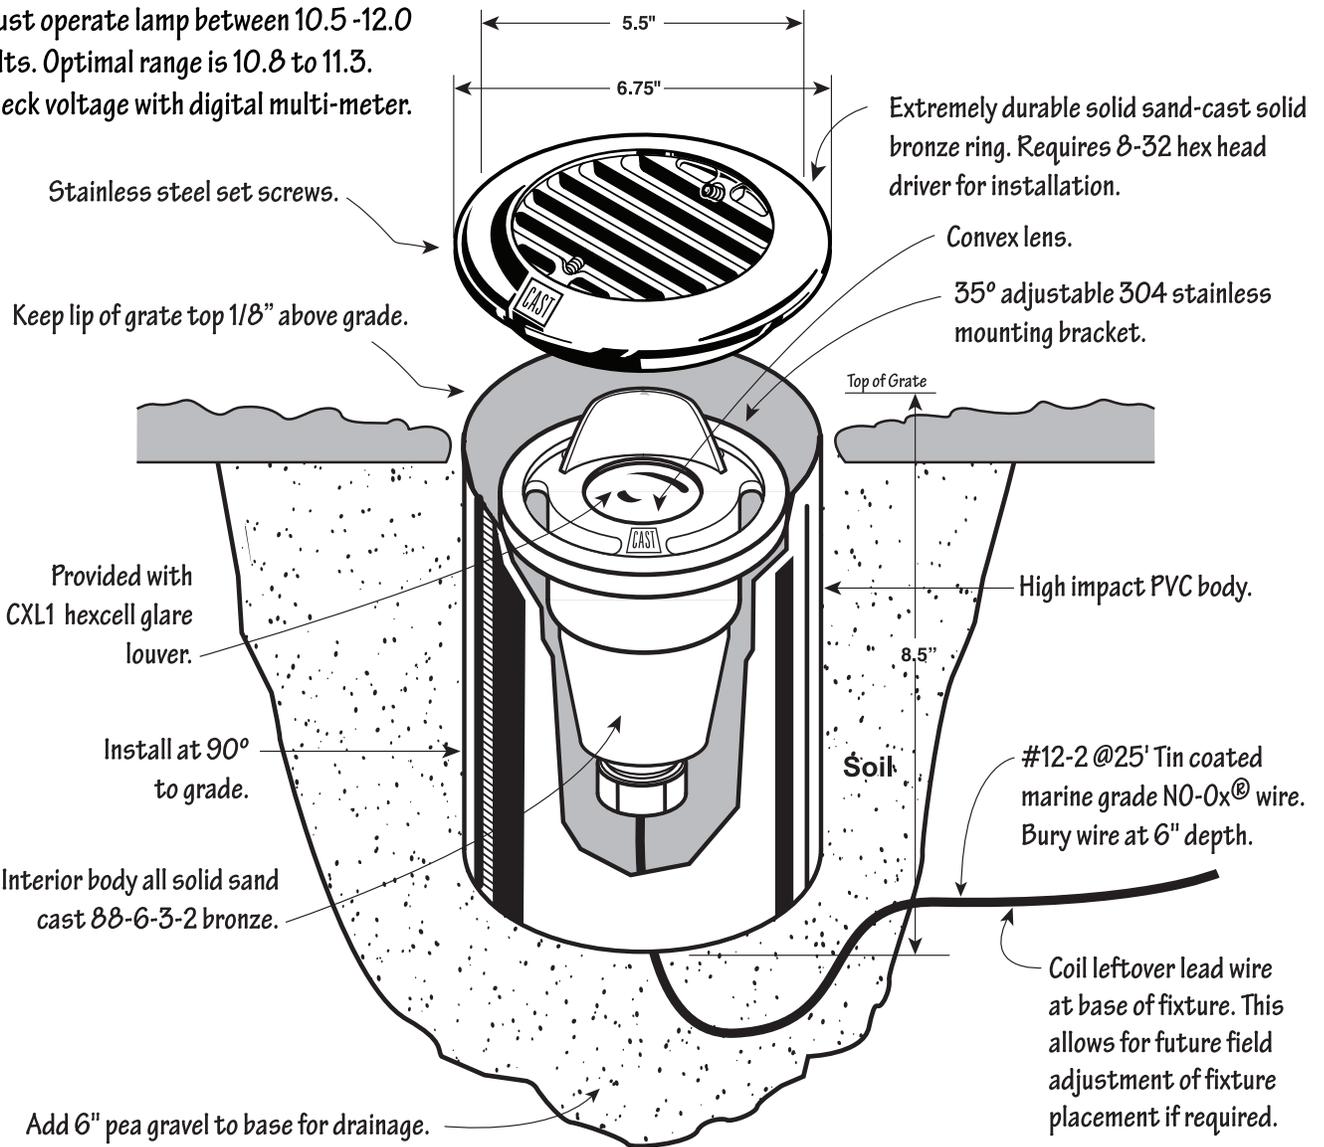

Drawing not to scale

Plan Symbol:

## Notes

- Requires MR-16 (not incl.) (max. rating 50W)
- Use only covered MR-16 lamps
- Do not install in low-lying areas where water can collect in

- fixture
- Refer to product installation sheet prior to installation

## OPTIONS

- |  |  |
|--|--|
| <input type="checkbox"/> Lens and Bronze Ring (CWLRI1CB)           | <input type="checkbox"/> Optical Spread Lens (COSL)              |
| <input checked="" type="checkbox"/> Bronze Grate (CWLGI1CB)(incl.) | <input type="checkbox"/> Optical Linear Spread Lens (COLL)       |
| <input type="checkbox"/> Lens for Bronze Grate (CWLGLENS)          | <input type="checkbox"/> Optical Frosted Lens (COFL)             |
|  | <input checked="" type="checkbox"/> Hexcell Louver (CXL1)(incl.) |