



8165 E Kaiser Blvd. Anaheim, CA 92808
 p. 714.282.2270
 f. 714.676.5558

Report No: L111407207

Date: 12/11/2014



NVLAP LAB CODE 200927-0

Report No: L111407207

Report Prepared For: Cast Lighting
 1120-A Goffle Rd., Hawthorne, NJ., 07506

Model Number: CNO1CBLED

Test: Electrical and Photometric tests

Standards Used: Appropriate part or all test guidelines were used for test performed:
IESNA LM79: 2008 Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products
ANSI NEMA ANSLG C78.377: 2008 Specification of the Chromaticity of Solid State Lighting Products
ANSI C82.77:2002: Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

Description of Sample: Client submitted the sample. Catalog number is CNO1CBLED . Received in working and undamaged condition. No modifications were necessary.

Testing Condition: Fixture is tested with no special conditions.

Sample Arrival Date: 12/8/14

Date of Tests: 12/9/14 - 12/9/14

Seasoning of Sample: No seasoning was performed in accordance with IESNA LM-79.

Equipment List

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Yokogawa Digital Power Meter	WT210	MT-EL06-S1	01/04/15
Xitron Power Analysis System	2503AH	MT-EL01	01/09/15
BK Precision DC Power Supply	1747	PSDC-04	01/08/15
Fluke Digital Thermometer	52k/J	MT-TP02-GC	01/04/15
LLI Type C Goniophotometer System	RMG-C-MKII	CD-LL04-GC	--
LLI 2M Sphere	2MR97	CD-SN03-S2	--
LLI Spectroradiometer	SPR-3000	MT-SC01-S2	Before Use

*All Results in accordance to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.


Test Summary

Manufacturer:	Cast Lighting
Model Number:	CNO1CBLED
Driver Model Number:	N/A
Total Lumens:	129.40
Input Voltage (VAC/60Hz):	12.00
Input Current (Amp):	0.42
Input Power (W):	4.42
Input Power Factor:	0.89
Current ATHD @ 12V(%):	50%
Current ATHD @ 24V(%):	N/A
Efficacy:	29
Color Rendering Index (CRI):	82
Correlated Color Temperature (K):	2808
Chromaticity Coordinate x:	0.4571
Chromaticity Coordinate y:	0.4195
Ambient Temperature (°C):	25.0
Stabilization Time (Hours):	0:30
Total Operating Time (Hours):	1:20
Off State Power(W):	0.00



FIG. 1 LUMINAIRE

*All Results in accordance to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.

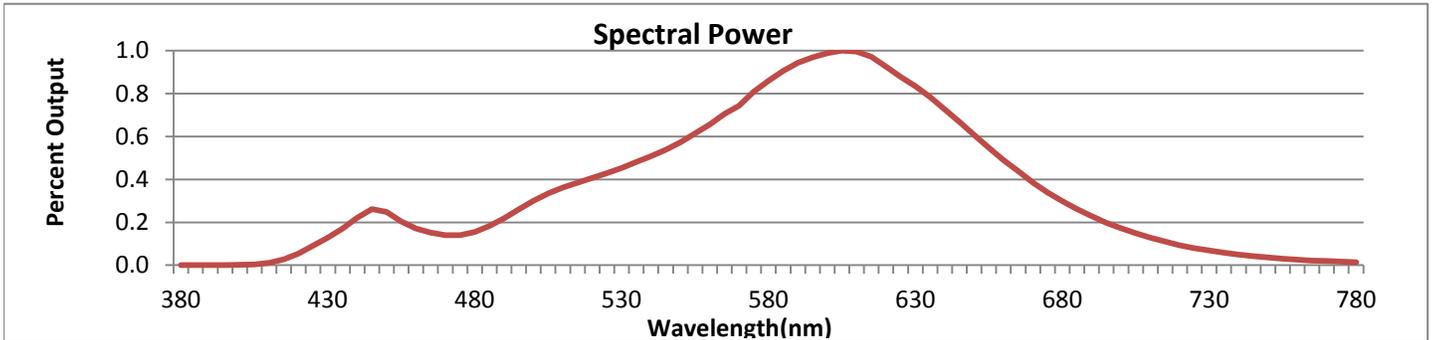


Wavelength	W/m ² nm	440	0.2222	510	0.3624	580	0.8604	650	0.6075	720	0.0925
380	0.0007	450	0.2476	520	0.4075	590	0.9440	660	0.4902	730	0.0681
390	0.0009	460	0.1709	530	0.4533	600	0.9892	670	0.3844	740	0.0499
400	0.0018	470	0.1395	540	0.5081	610	0.9966	680	0.2988	750	0.0361
410	0.0107	480	0.1554	550	0.5739	620	0.9268	690	0.2286	760	0.0259
420	0.0546	490	0.2188	560	0.6563	630	0.8343	700	0.1724	770	0.0191
430	0.1285	500	0.3000	570	0.7438	640	0.7259	710	0.1285	780	0.0140

CRI & CCT

x	0.4571
y	0.4195
u'	0.2568
v'	0.5303
CRI	82.10
CCT	2808
Duv	0.00354

R Values

R1	79.44
R2	89.33
R3	97.87
R4	80.76
R5	79.65
R6	87.74
R7	83.74
R8	58.00
R9	5.07
R10	76.63
R11	79.99
R12	74.44
R13	81.37
R14	99.06

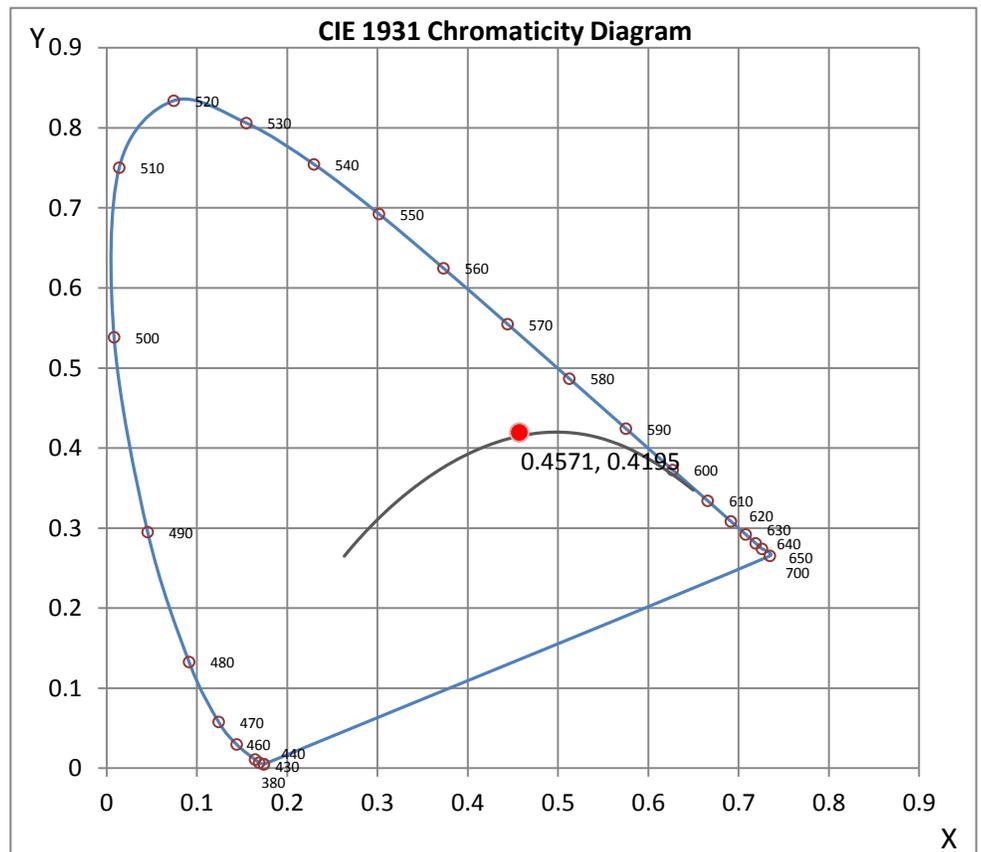

*All Results in accordance to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.

Test Methods

Photometric Measurements - Goniophotometer

A Custom Light Laboratory Type C Rotating Mirror Goniophotometer was used to measure candelas(intensity) at each angle of distribution as defined by IESNA for the appropriate fixture type.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Spectral Measurements - Integrating Sphere

A Sensing Spectroradiometer SPR-3000, in conjunction with Light Laboratory 2 meter integrating sphere was used to measure chromaticity coordinates, correlated color temperature(CCT) and the color rendering index(CRI) for each sample.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Disclaimers:

This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of Federal Government.

Report Prepared by : Wilson Khounlavong

Test Report Released by:



Jeff Ahn
Engineering Manager

Test Report Reviewed by:



Steve Kang
Quality Assurance

**Attached are photometric data reports. Total number of pages: 11*



8165 E. Kaiser Blvd. Anaheim, CA 92808
 p. 714.282.2270
 f. 714.676.5558

Photometric Test Report

IES ROAD REPORT
PHOTOMETRIC FILENAME : L111407207.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] L111407207
 [TESTLAB] LIGHT LABORATORY, INC.
 [ISSUEDATE] 12/11/2014
 [MANUFAC] CAST LIGHTING
 [LUMCAT] CNO1CBLED
 [LUMINAIRE] 8"DIA X 31-3/4"H. LED LUMINAIRE
 [MORE] CLEAR LENS
 [BALLASTCAT] N.A.
 [BALLAST] N.A.
 [LAMPPOSITION] 0,0
 [LAMPCAT] N/A
 [OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND
 [MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
 [INPUT] 12VAC, 4.42W
 [TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

IES Classification	Type V
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	129
Downward Total Efficiency	N.A. (absolute)
Total Luminaire Efficiency	N.A. (absolute)
Luminaire Efficacy Rating (LER)	29
Total Luminaire Watts	4.42
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Maximum Candela	42.74
Maximum Candela Angle	0H 10V
Maximum Candela (<90 Degrees Vertical)	42.74
Maximum Candela Angle (<90 Degrees Vertical)	0H 10V
Maximum Candela At 90 Degrees Vertical	.39 (0.3% Luminaire Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	1.77 (1.4% Luminaire Lumens)
Cutoff Classification (deprecated)	N.A. (absolute)

IES ROAD REPORT
PHOTOMETRIC FILENAME : L111407207.IES


LUMINAIRE CLASSIFICATION SYSTEM (LCS)

	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	17.0	N.A.	13.2
FM - Front-Medium (30-60)	37.5	N.A.	29.0
FH - Front-High (60-80)	9.4	N.A.	7.3
FVH - Front-Very High (80-90)	0.5	N.A.	0.4
BL - Back-Low (0-30)	17.0	N.A.	13.2
BM - Back-Medium (30-60)	37.5	N.A.	29.0
BH - Back-High (60-80)	9.4	N.A.	7.3
BVH - Back-Very High (80-90)	0.5	N.A.	0.4
UL - Uplight-Low (90-100)	0.4	N.A.	0.3
UH - Uplight-High (100-180)	0.1	N.A.	0.1
Total	129.3	N.A.	100.0
BUG Rating	B0-U1-G0		

CANDELA TABULATION

Vert. Angles	Horizontal Angles
	<u>0</u>
0	0.00
5	39.81
10	42.74
15	41.98
20	41.14
25	40.47
30	39.71
35	38.75
40	37.40
45	35.20
50	31.78
55	26.95
60	21.01
65	14.15
70	8.01
75	4.04
80	1.77
85	0.79
90	0.39
95	0.32
100	0.31
105	0.00
110	0.00
115	0.00
120	0.00
125	0.00
130	0.00
135	0.00
140	0.00
145	0.00
150	0.00
155	0.00
160	0.00
165	0.00
170	0.00
175	0.00
180	0.00


COEFFICIENTS OF UTILIZATION

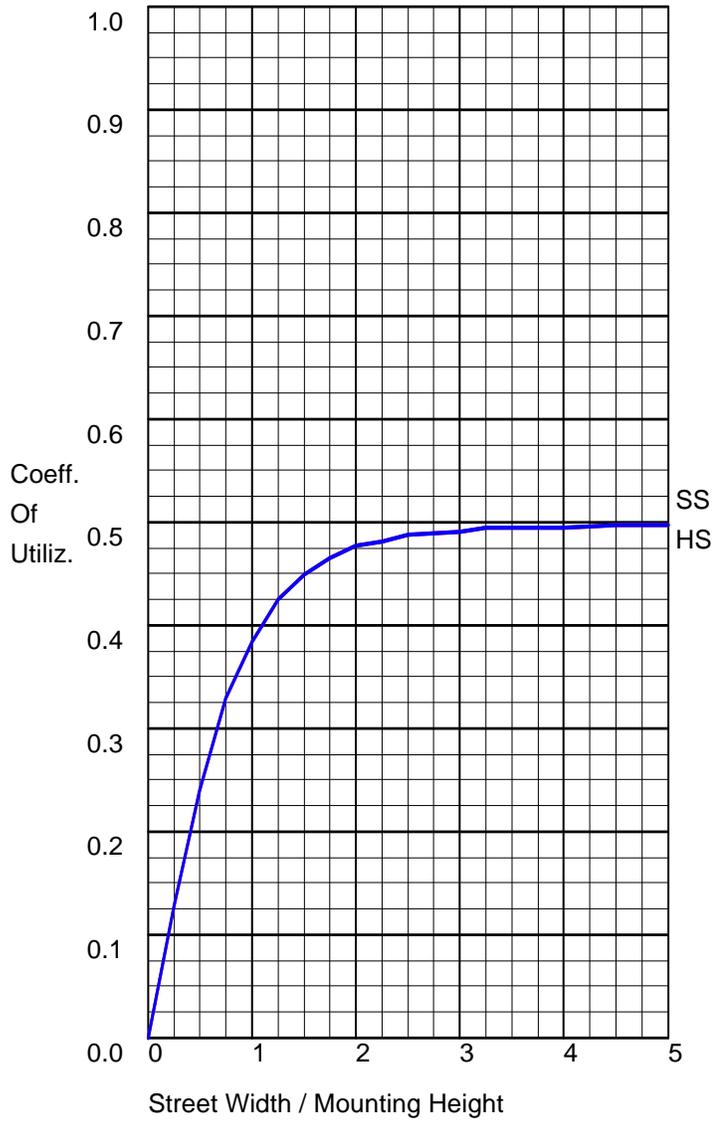

FLUX DISTRIBUTION


	Lumens	Percent Of Luminaire
Downward Street Side	64.5	49.8
Downward House Side	64.5	49.8
Downward Total	129.0	99.7
Upward Street Side	0.2	0.2
Upward House Side	0.2	0.2
Upward Total	0.4	0.3
Total Flux	129.4	100.0

POLAR GRAPH

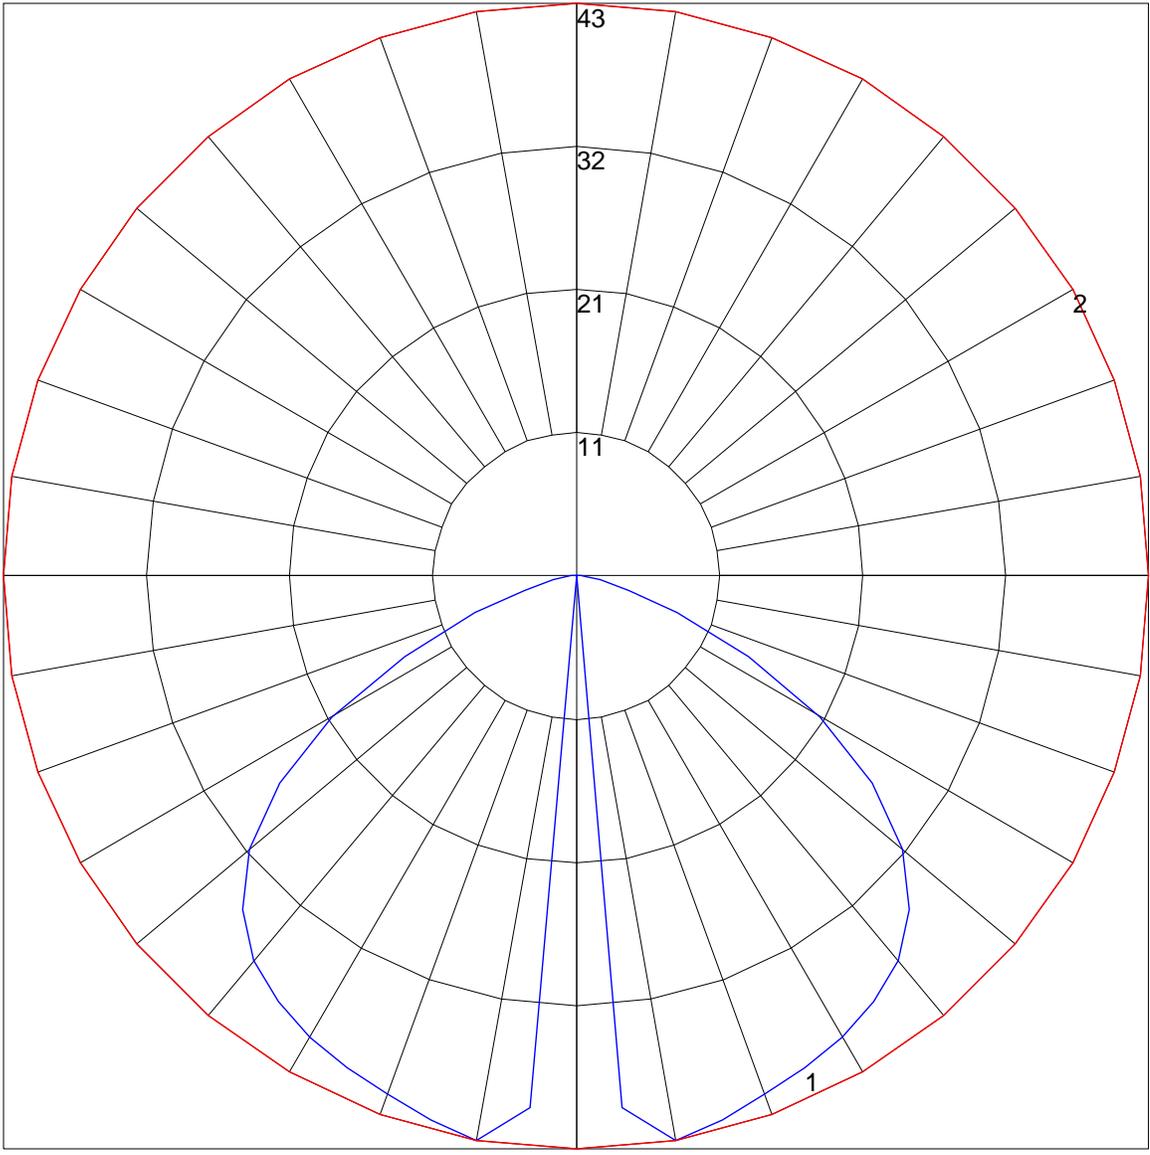

Maximum Candela = 42.74 Located At Horizontal Angle = 0, Vertical Angle = 10
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (10) (Through Max. Cd.)

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

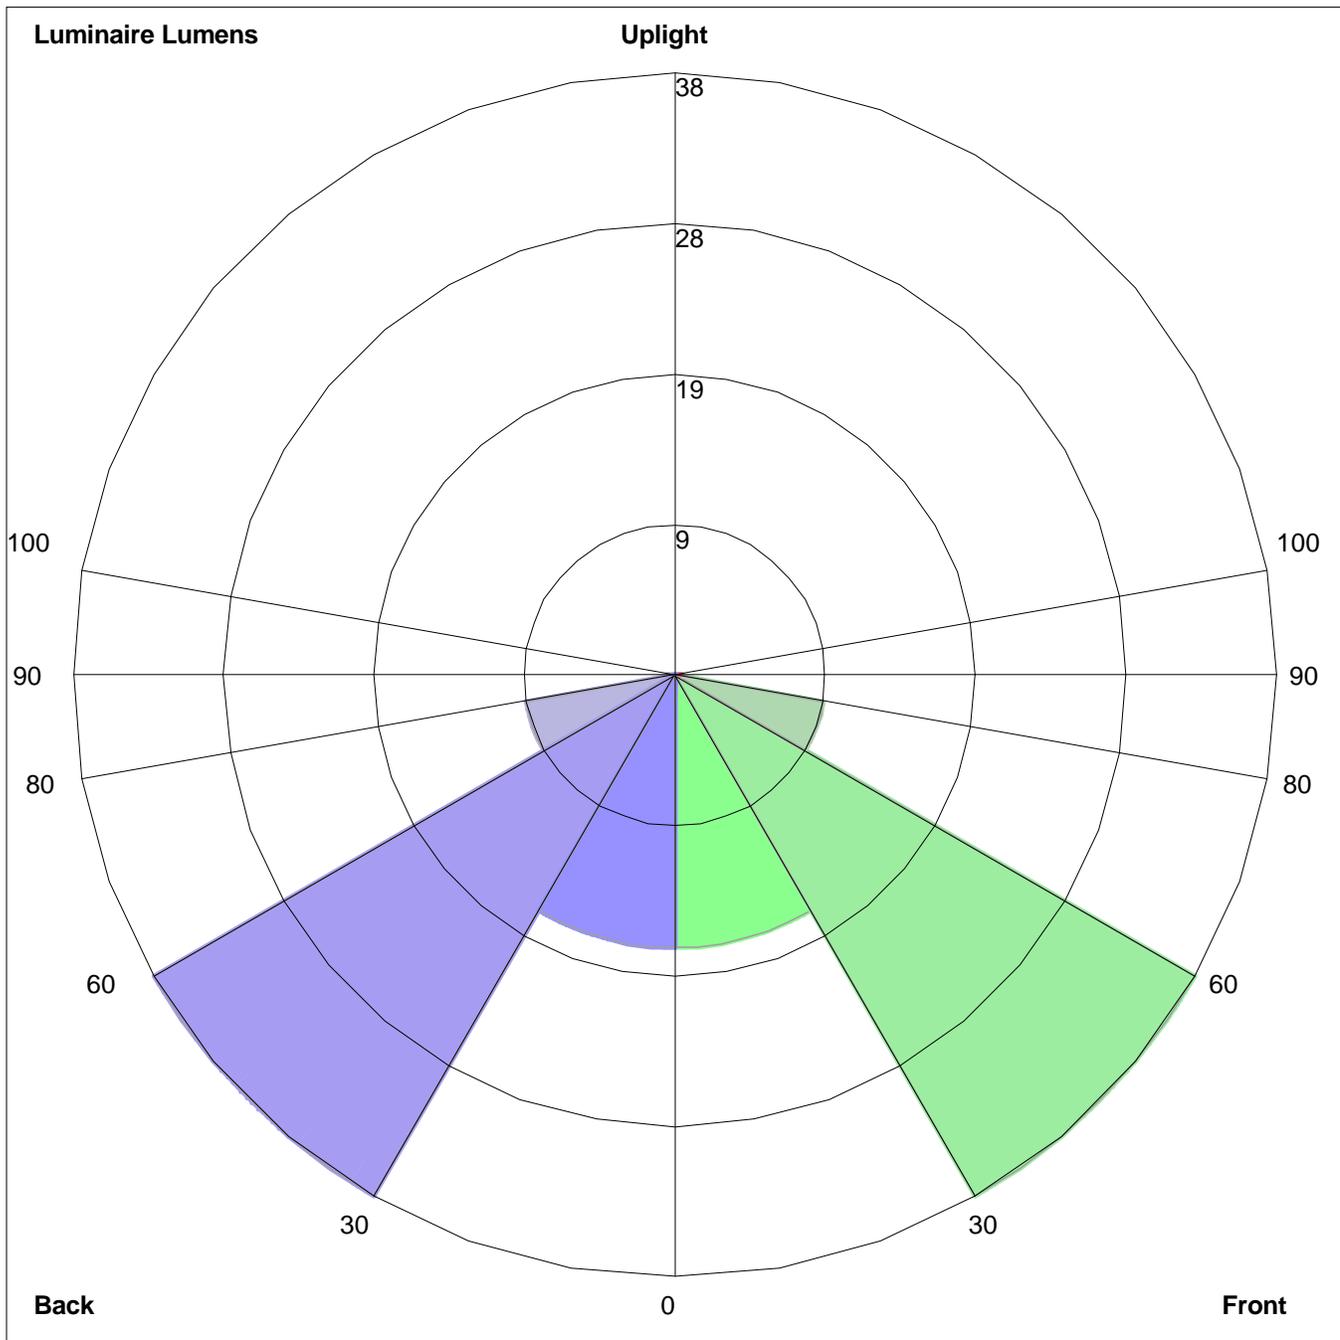

Luminaire Lumens:
 Front: Low=17.0, Medium=37.5, High=9.4, Very High=0.5
 Back: Low=17.0, Medium=37.5, High=9.4, Very High=0.5
 Uplight: Low=0.4, High=0.1

BUG Rating : B0-U1-G0