




SWML3R Multi Lumen Wall Wash, 2700°K Hand Held IR Remote Lumen Setting

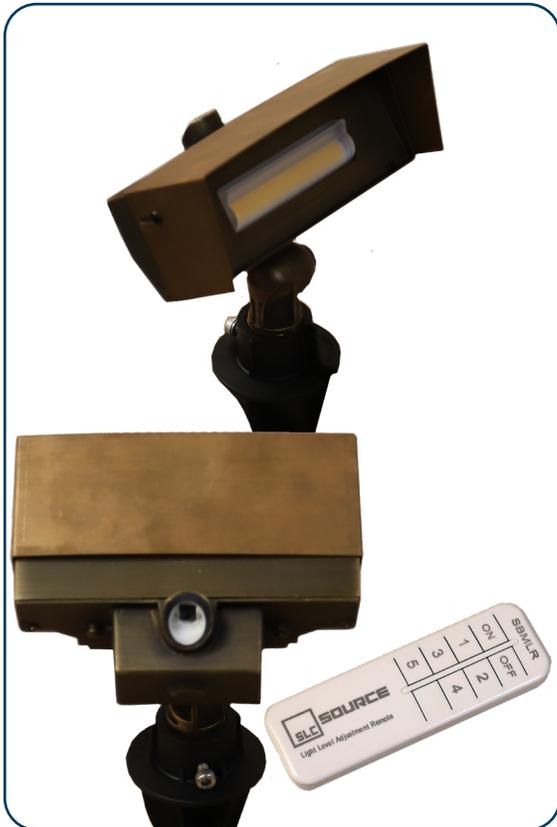

Applications:

The SOURCE by CAST Multi Lumen Wall Wash with hand held IR remote lumen setting allows you to remotely switch between five lumen (1-5) outputs (93Lm, 214Lm, 426Lm, 592Lm, and 687Lm) using the IR remote, SBMLR (sold separately or one is provided free with the purchase of 3 fixtures).

Features:

- Brass body & knuckle with bronze finish
- 20° X 80° wall wash
- Five adjustable lumen settings
- Wide IR receiver window for optimal communication
- Fixture blinks to confirm lumen setting 1, 2, 3, 4, & 5
- Provided with adjustable glare shroud
- IP65 rated for harsh environments
- 2700°K color temperature >80 CRI, L-70 50,000 HR LED
- Operating range from -30°C to +45°C
- Includes Set-N-Stake® Quick-Link composite with brass insert stake mount & allen key
- Includes 6 FT 105°C rated #18-2 lead wire
- 10-year warranty



*Requires PN# SBMLR Hand-Held IR Remote to easily adjust lumen levels. Get one free with the purchase of 3 fixtures! Does not include 2-AAA batteries sold separately.

SWML3R - IR Lumen Level Controlled Wall Wash

ELECTRICAL & PHOTOMETRIC TEST RESULTS

VOLTAGE RANGE 12V - 15V AC/DC

Actual Field Performance may vary by +/-5%

Power Setting	Input Voltage	Current Input	Consumed Wattage	Power Factor	Volt Amp	Light Output Lumens	CCT	CRI
#1	12V AC/DC	.170A	1.5	0.8	1.875	93	2700°K	>80
#2	12V AC/DC	0.333	3	0.8	3.75	214	2700°K	>80
#3	12V AC/DC	0.66	6	0.8	7.5	426	2700°K	>80
#4	12V AC/DC	0.945	9	0.8	11.25	592	2700°K	>80
#5	12V AC/DC	1.113	11	0.8	13.75	687	2700°K	>80

SWML3R - IR Lumen Level Controlled Wall Wash

NOTE: REQUIRES Model #SBMLR - IR Hand Held Remote to adjust lumen levels. 2 Included per Case of Six Pieces. Does not include 2-AAA batteries sold separately.