



Tree Light Mounting Canopy & Hardware (XCBPTMC1) & (CTREEH1, CTREEH24)

CAST Tree Light Mounting - Protecting Trees while Moonlighting



Description:


By using the tree light mounting canopy and hardware you can prevent damage to the tree and effectively install your light. When the mounting hardware is properly installed, it creates at least an inch of space between the bark and mounting canopy. As the tree grows, the hardware will require periodic backing-off to maintain the offset distance.

*For detailed information, please refer to our best practices on Tree Light Mounting and Wiring.

Tree Mount Canopy (XCBPTMC1):

Quick-release mounting canopy, included with the CCTL1C and CTLED141, while also available as an accessory.

- Solid Bronze Construction
- Stainless Steel Thumb Screw
- Slotted core allows the installer to affix the canopy prior to mounting
- Tree Light stud slips into canopy for easy insertion
- Extra long screw slots allow for non-precise alignment with the mounting screws

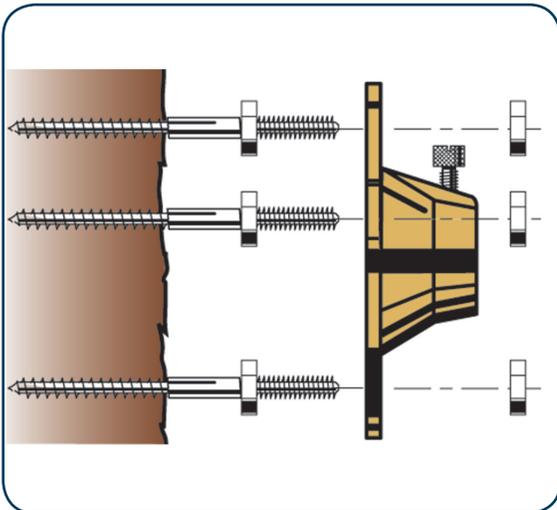

CTREEH1: Includes:

- (3) 10-24 x 3/8" stainless nut
- (3) 10-24 x 3/8" stainless nut "K" style
- (3) Hanger Bolt 3.75" long with 1" of 10-24 thread x 1.5" wood screw with a blank space 1.25" in center

CTREEH24: Includes:

- Bulk pack of 24 CTREEH1 and a 3/8" drive socket



*XCBPTA2

***Note:** To use our Tree Mount Canopy with a threaded fixture you will need to use the XCBPTA2 Transition Adapter (1/2" FPT X Socket Adapter)