

Lighting Specification Sheet


CAST Set-in-Stone® Wall Light Installation System

CAST **LANDSCAPE™**

Old world craftsmanship...tomorrow's technology®

Project: _____ Date: _____
Fixture Type: _____ Quantity: _____
Specifier: _____

Drawing not to scale

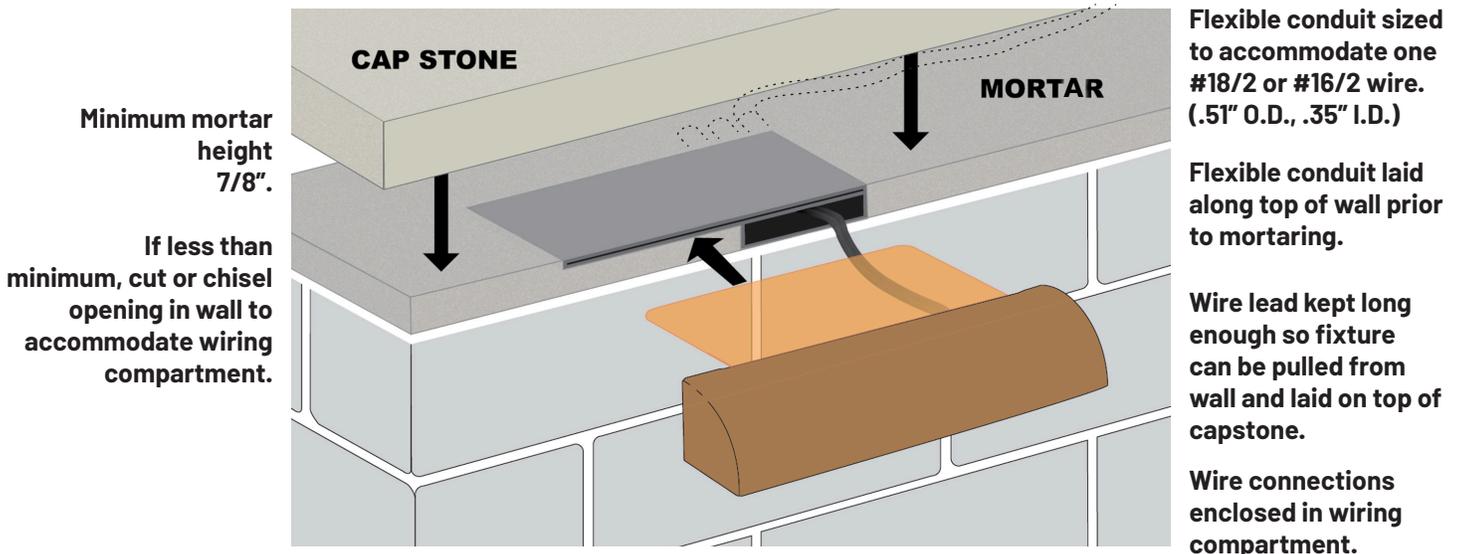

Installation Specifications

- Modules and flexible conduit must be installed prior to mortaring.
- Wires can be run through conduits either before or after mortaring
- Drop-in installation of Set-in-Stone Module requires a minimum mortar height of 7/8".
- If mortar is less than 7/8" height, then an opening can be cut or chiselled to accommodate the module wiring compartment (3 1/4" width x 4 3/8" depth x 7/8" height).
- A bubble or laser level should be used to ensure plumb installation from left to right and front to back.
- Module should rest flush against underside of capstone.
- Module is provided with mylar film cover to protect wiring compartment.
- If mortaring is done prior to wiring, then film cover should be kept in place until mortar is dry, then cut away to allow wiring and insertion of fixture.
- If wiring is done prior to mortaring, then film should be peeled back to open compartment. After wiring, re-seal film cover. Wires may protrude at corners of sealed opening.
- Excess mortar should be cleared away from flat bracket slot before mortar hardens. A knife can be used to ensure no mortar obstructs slot.
- After mortar dries, use a blade to cut away polyester film (or tape) and reveal wiring compartment.

Detailed instructions are included with Set-in-Stone™ Modules.
Instructional videos can be found at www.cast-lighting.com.

Set-in-Stone is a registered trademark of CAST Lighting. Patent Pending.