

Source Lighting by CAST

1120-A Goffle Road Hawthorne, NJ 07506 Ph: (973) 423-2303 Fax: (973) 423-2304

Email: info@cast-lighting.com

SEWL1BT Bluetooth Color Control Capstone Light

IMPORTANT SAFETY INSTRUCTIONS:

- Please read carefully before installing. Save these instructions.
- Consult with a qualified electrical contractor and local electrical codes before installing any electrical product.
- Clean fixture with mild soap. Do not use acid or any other solvent-based cleaner.
- Do not submerse fixture in water.
- All fixtures must be installed 10 feet (3.05m) away from a pool, spa, or fountain.
- Use fixture with low-voltage outdoor lighting system only.

DO NOT OVERLOAD LOW VOLTAGE CABLE or TRANSFORMER.

ASSEMBLY INSTRUCTIONS: Your fixture is ready to be connected using your preferred wiring method right out of the box


INSTALLATION/MOUNTING INSTRUCTIONS:

Note: We recommend, when installing any low-voltage fixture, that you have the following:


Voltage Meter, Wire Nuts, Amp Probe, Basic Hand Tools for Adjustment. Use Waterproof Wire Splice Connections.

INSTALLATION/MOUNTING & WIRING STEPS:

- 1. To prevent electrical shock, disconnect transformer from electrical supply before service.
- 2. Best spacing is five to seven feet on center. Closer spacing on lower height walls (i.e 24"), wider spacing on higher walls (i.e 48").
- 3. Place/set fixture in desired location. Unit can be mounted in CAST Set-In-Stone® module system, (CSIS & CSISC)
- 4. Run wire lead to the desired connection point with the main wire lead running to the transformer. Make sure you do not damage the #18-2 wire during installation.
- Cut wire lead as needed, while leaving enough extra wire to move fixture.
- 6. Copper bracket can be bent slightly out or in to adjust light dispersion on wall surface.



7. LED module can be removed by unscrewing 8-32 slotted thumb screw.

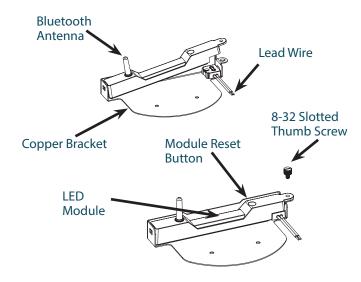

MODULE RESET BUTTON: If Bluetooth password is forgotten, or other issues require resetting, poke the module reset button with a pointed object for three seconds. The light will dim/flash, indicating that the reset is successful.

WARNING: INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY TO PERSONS:

- Lighted lamp is HOT. Lamp is hot when illuminated; do not touch when lamp is on.
- Turn off/unplug electrical power before modifying the lighting system.
- Allow fixture to cool before touching or replacing optics.
- Lamps get HOT quickly! Contact only switch/plug when turning on.
- Do not touch hot lens, guard, or enclosure.
- Keep away from potential flammable materials, structures, and/or landscapes.
- Do not operate fixture if cover, fitting, and/or shield is damaged or missing.

<u>Download CAST Lighting Btooth-Spot from the App Store (Apple) or Google Play (Android).</u>

SEWL1BT Bluetooth Color Control Capstone Light				
Color	Voltage Input	Consumed Wattage	Light Output	Dominant WL
Red	12V AC/DC	4.17W	93.42lm	627.0nm
Green	12V AC/DC	3.74W	188.16lm	527.9nm
Blue	12V AC/DC	3.92W	42.96lm	462.6nm
White Color 2700K	12V AC/DC	4.01W	262.78lm	

Operating Voltage 12V to 15V AC/DC