



**SOURCE**  
LIGHTING CO.

Source Lighting by CAST

1120-A Goffle Road

Hawthorne, NJ 07506

Ph: (973) 423-2303 | Email: info@cast-lighting.com

## SGL36R Series: 36° Degree LED IR Remote Multi Lumen Ground Light with Field Changeable Optics, (15°, 24°, 36°, 60°, 80° Wash)


### **IMPORTANT SAFETY INSTRUCTIONS:**

- Please read carefully before installing. Save these instructions.
- Consult with a qualified electrical contractor and local electrical codes before installing any electrical product.
- Clean fixture with mild soap. Do not use acid or any other solvent-based cleaner.
- Do not submerge fixture in water.
- All fixtures must be installed 10 feet (3.05m) away from a pool, spa, or fountain.
- Use fixture with low-voltage outdoor lighting system only.

### **DO NOT OVERLOAD LOW VOLTAGE CABLE or TRANSFORMER.**

**ASSEMBLY INSTRUCTIONS:** Thread the three ground mount pins into the outer ring of ground light body. Fixture is ready to be connected using your preferred wiring method right out of the box.

**LUMEN ADJUSTMENT:** The SGL36R has four lumen setting options numbered 1, 2, 3, 4, which are indicated on the handheld remote model #SBMLR, (2 pcs AAA batteries not included, one free lumen adjustment remote provided per case of six ground lights). Simply point the handheld remote at the IR receiver window at the back of the fixture and press the desired lumen level setting. The fixture will blink once for setting one, twice for setting two, three times for setting three and four times for setting four. Each lumen level is the equivalent of legacy halogen 10W, 20W, 30W, and 35W fixtures. See chart on page two for information on fixture performance. NOTE: Infrared IR Handheld Remote has a 120° beam angle throw and if several fixtures are near one another, beam spill could activate multiple fixtures. In this scenario, either aim away from the center of the fixtures to miss the neighboring fixtures, or get closer to the fixture IR receiver window, which reduces the IR beam spill. IR remote works best at between one and twenty feet from fixture. ALSO NOTE: A clear line of sight from the IR receiver window and remote is required for communication with fixture when setting lumen levels.

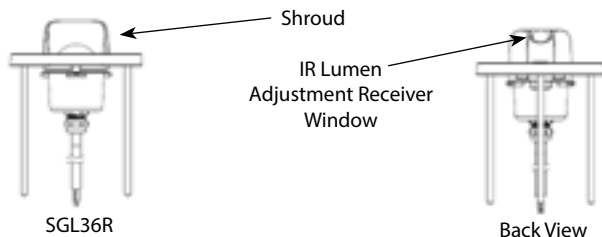


### **INSTALLATION/MOUNTING INSTRUCTIONS:**

Note: We recommend, when installing any low-voltage fixture, that you have the following: Voltage Meter, Wire Nuts, Amp Probe, Basic Hand Tools for Adjustment.


### **INSTALLATION/MOUNTING & WIRING STEPS:**

1. To prevent electrical shock, disconnect transformer from electrical supply before service.
2. Place fixture in desired location. Do not install in a location where fixture will sit in a low spot where water can accumulate, thus submerging the fixture.
3. Run wire lead to the desired connection point with the main wire lead running to the transformer, keeping most of the excess wire at the fixture. Bury excess wire directly at the base of the fixture.
4. Connect fixture wire lead to main wire lead from the transformer using desired wire connection suitable for underground burial or wet location. Use underground low-energy cable.

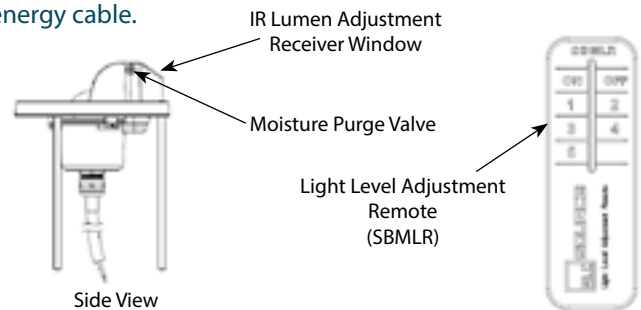

### **WARNING: INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY TO PERSONS:**

- Lighted lamp is HOT. Lamp is hot when illuminated; do not touch when lamp is on.
- Turn off/unplug electrical power before modifying the lighting system.
- Allow fixture to cool before touching or replacing optics.
- Lamps get HOT quickly! Contact only switch/plug when turning on.
- Do not touch hot lens, guard, or enclosure.
- Keep away from potential flammable materials, structures, and/or landscapes.
- Do not operate fixture if cover, fitting, and/or shield is damaged or missing.

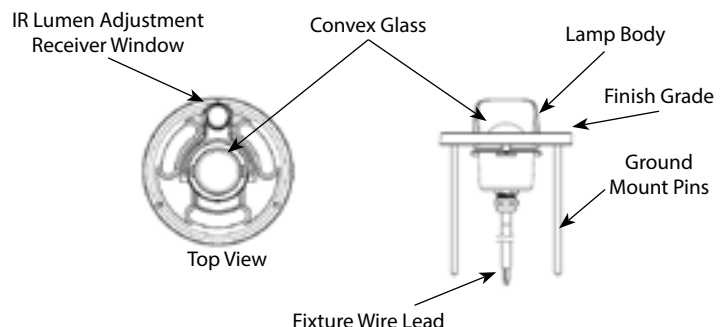

### SERVICE INSTRUCTIONS:

To prevent electrical shock, disconnect transformer from electrical supply before service, allow luminaires to cool.

### OPTIC REPLACEMENT:

Replacing optics requires the use of the plastic optic removal tool (part# SBMLTOOL) which can be purchased separately and is provided free (one per case of six fixtures). For best results, use a 9/16 or 14mm socket or a 5/16 allen key to provide the handle/leverage required to remove the lock ring holding the convex lens to the fixture body. It is best to perform this on a clean will-lit surface free of moisture and dirt.

**Step #1**–Clean dirt, water, and/or leaves debris from convex glass lens. Use compressed air or a brush to remove fine particulate from lens.

**Step #2**–Place fixture on a flat surface. Hold fixture with one hand, place two male optic removal tool tabs in mating female tabs of lock ring and turn counter clockwise loosening lock ring.


**Step #3**–Remove lock ring and remove convex glass lens and white combination o-ring gasket seal.

**Step #4**–Remove optic and replace with new optic, making sure the writing on the optic indicating beam angle is pointing forward and visible. If dirt or debris fall into optic chamber, use compressed canned moisture free gas to clear dirt from chamber. Do not damage LED.

**Step #5**–Replace o-ring gasket seal making sure o-ring side of gasket nests in groove of fixture body, replace glass convex lens, replace lock ring. Using lock ring tool and socket, turn clockwise to compress assembly making watertight seal.

**Step #6**–DONE!!

**NOTE: INSPECT LOCK RING BEFORE INSTALLATION. TIGHTEN IF LOOSE.**

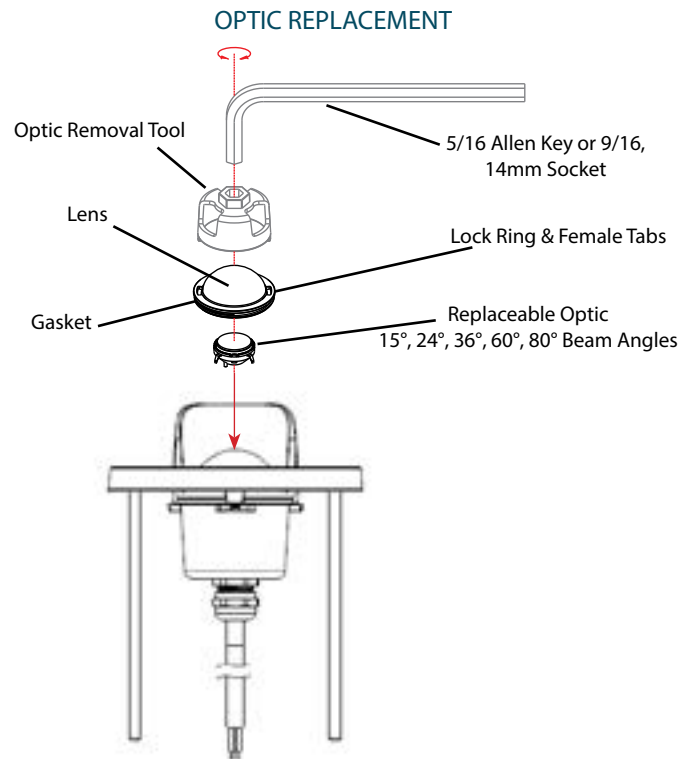

## SGL36R Series: 36° Degree LED IR Remote Multi Lumen Ground Light with Field Changeable Optics

Voltage Range 12V - 15V AC/DC Actual Results May Vary + or - 5%						LIGHT OUTPUT LUMENS / BEAM SPREAD						
Replacement Optic Part #						SML015	SML024	SML036 (Included)	SML060	SML080		
Halgen Equiva-lent	Power Seting	Voltage Input	Current /Amps Input	Consumed Wattage	Power Factor	15°	24°	36°	60°	80° WASH	CCT	CRI
35W	#4, 4.2W	12.0 VAC	0.452 A	3.02	0.784	260 Lm	255 Lm	250 Lm	215 Lm	210 Lm	2800°K	85
30W	#3, 3.0W	12.0 VAC	0.329 A	2.25	0.767	200 Lm	195 Lm	190 Lm	163 Lm	160 Lm	2800°K	85
20W	#2, 2.0W	12.0 VAC	0.216 A	1.5	0.748	138 Lm	135 Lm	130 Lm	130 Lm	128 Lm	2800°K	85
10W	#1, 1.0W	12.0 VAC	0.120 A	0.77	0.722	86 Lm	85 Lm	80 Lm	70 Lm	68 Lm	2800°K	85
Replaceable Optic Part # (Requires #SBMLTOOL, 1 piece included per 6 case.)						SML015	SML024	SML036 (Included)	SML060	SML080		